
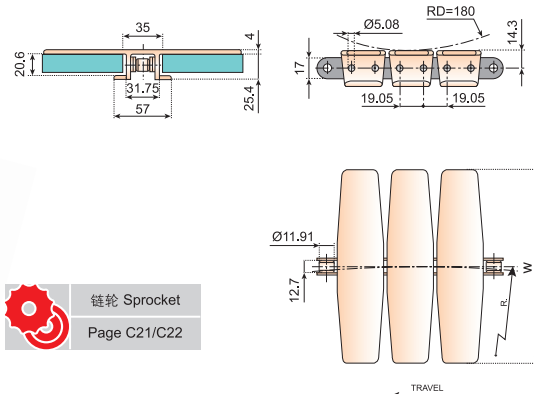


扣链式转弯输送链 Plastic Conveyor Chains With Base Roller Chains

1873 扣链式转弯输送链

1873 SIDEFLEXING CHAIN WITH BASE ROLLER CHAIN, PITCH 19.05mm (3/4")

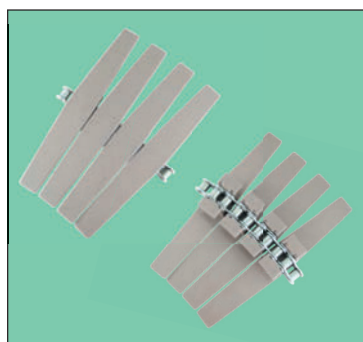



链号 Chain No.	宽度 Width (W)		重量 Weight		最小侧弯半径 Minimum Radius mm
	mm	inch	kg/m	lbs/ft	
LF1873 - K325	82.6	3.25	2.00	1.42	350
LF1873 - K450	114.3	4.50	2.30	1.55	350
LF1873 - K600	152.4	6.00	2.40	1.62	450
LF1873 - K750	190.5	7.50	2.60	1.75	500
LF1873 - K1000	254.0	10.00	2.80	1.88	500
LF1873 - K1200	304.8	12.00	3.00	2.02	610
LF1873 - K1600	406.4	16.00	3.45	2.65	610

- 主要适用于食品工业中各种转弯输送。
- 最大输送长度：24米
- 最高速度：
 - 润滑剂 90米/分钟
 - 干燥 60米/分钟
- 底链材质：
 - 不锈钢
 - 碳钢
- 包装：
 - 10英尺 = 3.048 米/盒
 - 1米 = 26片

- Primarily suitable for curved conveyor lines in the food industry.
- Max. conveying length: 24 m
- Max. speed:
 - Lubricated: 90 m/min
 - Dry: 60 m/min
- Base roller chain material:
 - Stainless steel SUS304
 - Carbon steel
- Packaging:
 - 10 ft = 3.048 m/box
 - 1 m = 26 pieces

1873G 扣链式防滑侧弯链

1873G SIDEFLEXING CHAIN WITH RUBBER TOP AND BASE ROLLER CHAIN, PITCH 19.05mm (3/4")

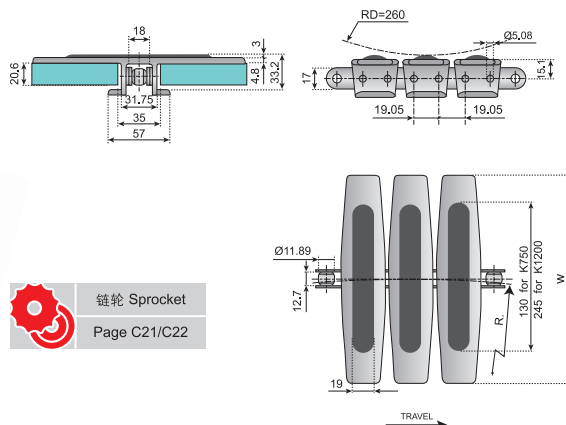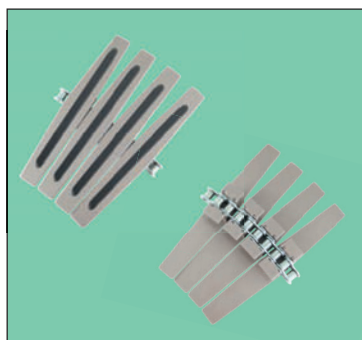

链号 Chain No.	宽度 Width (W)		重量 Weight		最小侧弯半径 Minimum Radius mm
	mm	inch	kg/m	lbs/ft	
LF1873 - K325G	82.6	3.25	2.20	1.69	350
LF1873 - K450G	114.3	4.50	2.33	1.79	350
LF1873 - K600G	152.4	6.00	2.60	2.00	450
LF1873 - K750G	190.5	7.50	2.80	2.16	500
LF1873 - K1000G	254.0	10.00	3.09	2.38	500
LF1873 - K1200G	304.8	12.00	3.34	2.57	610
LF1873 - K1600G	406.4	16.00	3.47	2.68	610


- 主要适用于食品工业中各种转弯输送。
- 最大输送长度：24米
- 最高速度：
 - 润滑剂 90米/分钟
 - 干燥 60米/分钟
- 底链材质：
 - 不锈钢
 - 碳钢
- 包装：
 - 10英尺 = 3.048 米/盒
 - 1米 = 26片

- Primarily suitable for curved conveyor lines in the food industry.
- Max. conveying length: 24 m
- Max. speed:
 - Lubricated: 90 m/min
 - Dry: 60 m/min
- Base roller chain material:
 - Stainless steel SUS304
 - Carbon steel
- Packaging:
 - 10 ft = 3.048 m/box
 - 1 m = 26 pieces


扣链式转弯输送链 Plastic Conveyor Chains With Base Roller Chains

1873SCS 扣链式输送链 (螺旋输送系统)

1873SCS CHAIN WITH RUBBER TOP (SPIRAL CONVEYOR SYSTEM)

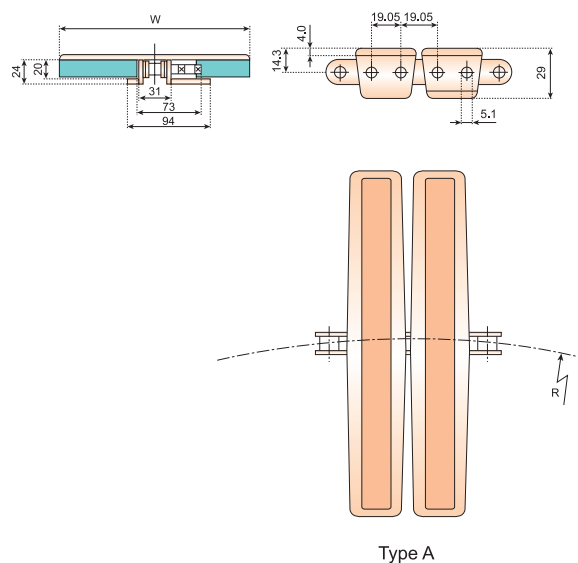

- 适用于各种高速转弯输送，如食品工业，餐盘输送等长距离输送线。
- 链条设计是由底链扣住塑钢顶板片而成。
- 底链材质：
 - 不锈钢
 - 碳钢
- 最大输送长度：
 - 不锈钢：24米
 - 碳钢：30米
- 最大负载拉力：
 - 不锈钢：≤2000N
 - 碳钢：≤4000N
- 最高速度：
 - 润滑剂 90米/分钟
 - 干燥 60米/分钟
- 包装：
 - 10英尺 = 3.048 米/盒
 - 1米 = 26片

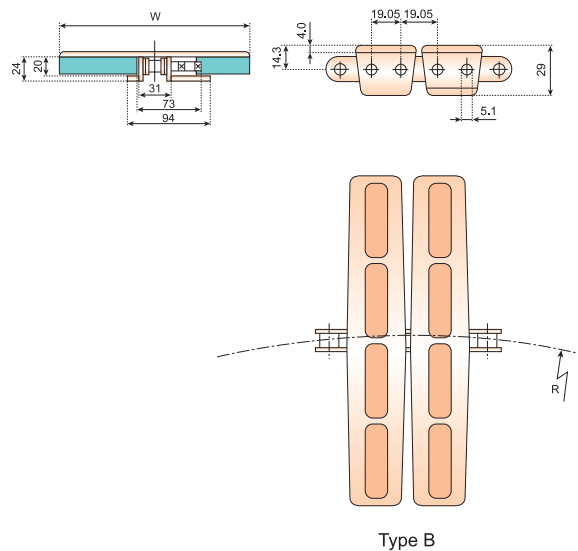

- Suitable for various high-speed curved conveyance applications, such as long-distance conveyor lines in the food industry and tray conveyance.
- The chain design consists of the base chain holding the plastic steel top plate.
- Base roller chain material:
 - Stainless steel SUS304
 - Carbon steel
- Max. conveying length:
 - Stainless steel: 24 m
 - Carbon steel: 30 m
- Max. tensile strength:
 - Stainless steel: ≤2000N
 - Carbon steel: ≤4000N
- Max. speed:
 - Lubricated: 90 m/min
 - Dry: 60 m/min
- Packaging:
 - 10 ft = 3.048 m/box
 - 1 m = 26 pieces




链号 Chain No.	宽度 Width (W)		重量 Weight		最小侧弯半径 Minimum Radius mm
	mm	inch	kg/m	lbs/ft	
LF1873SCS - K1200	304.8	12.00	3.61	2.78	450
LF1873SCS - K1575	400.0	15.75	4.05	3.12	610
LF1873SCS - K2000	508.0	20.00	4.75	3.66	680

扣链式转弯输送链 Plastic Conveyor Chains With Base Roller Chains

3873 扣链式无间隙转弯输送链

3873 CLOSED SURFACE SIDEFLEXING CHAIN WITH BASE ROLLER CHAIN, PITCH 19.05mm (3/4")

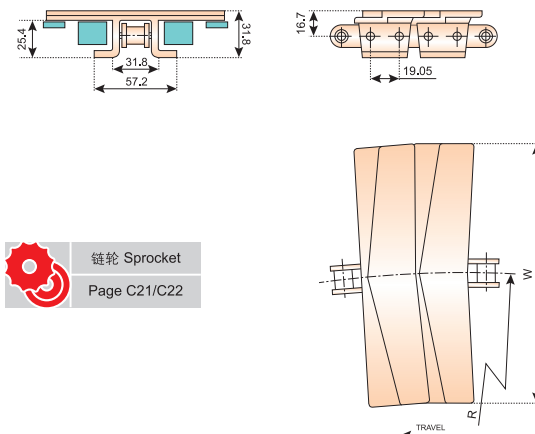

链轮 Sprocket

Page C21/C22

- 主要适用于食品工业中各种转弯输送。

- 最大输送长度：24米

- 最高速度：

- 润滑剂 90米/分钟
- 干燥 60米/分钟

- 底链材质：

- 不锈钢
- 碳钢

- 包装：

- 10英尺 = 3.048 米/盒
- 1米 = 26片

- Primarily suitable for curved conveyor lines in the food industry.

- Max. conveying length: 24 m

- Max. speed:

- Lubricated: 90 m/min
- Dry: 60 m/min

- Base roller chain material:

- Stainless steel SUS304
- Carbon steel


- Packaging:

- 10 ft = 3.048 m/box
- 1 m = 26 pieces

链号 Chain No.	宽度 Width (W)		重量 Weight		最小侧弯半径 Minimum Radius mm
	mm	inch	kg/m	lbs/ft	
LF3873 - K1000	254.0	10.00	3.24	2.50	450
LF3873 - K1200	304.8	12.00	3.75	2.90	450
LF3873 - K1600	406.4	16.00	5.00	3.36	450

3873G 扣链式无间隙带胶转弯输送链

3873G CLOSED SURFACE SIDEFLEXING CHAIN WITH BASE ROLLER CHAIN AND RUBBER TOP, PITCH 19.05mm (3/4")

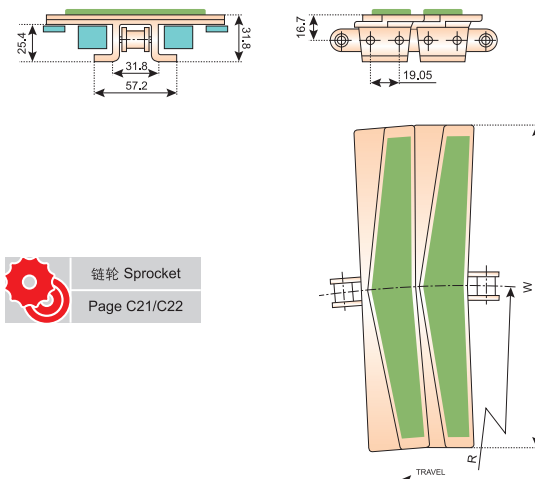

链轮 Sprocket

Page C21/C22

- 主要适用于食品工业中各种转弯输送。

- 最大输送长度：24米

- 最高速度：

- 润滑剂 90米/分钟
- 干燥 60米/分钟

- 底链材质：

- 不锈钢
- 碳钢

- 包装：

- 10英尺 = 3.048 米/盒
- 1米 = 26片

- Primarily suitable for curved conveyor lines in the food industry.

- Max. conveying length: 24 m

- Max. speed:

- Lubricated: 90 m/min
- Dry: 60 m/min

- Base roller chain material:

- Stainless steel SUS304
- Carbon steel

- Packaging:


- 10 ft = 3.048 m/box
- 1 m = 26 pieces

链号 Chain No.	宽度 Width (W)		重量 Weight		最小侧弯半径 Minimum Radius mm
	mm	inch	kg/m	lbs/ft	
LF3873 - K1000G	254.0	10.00	3.60	2.47	450
LF3873 - K1200G	304.8	12.00	3.95	2.66	450
LF3873 - K1600G	406.4	16.00	5.30	3.58	450

扣链式转弯输送链 Plastic Conveyor Chains With Base Roller Chains


3873-L 无间隙左转弯输送链板

3873-L CLOSED SURFACE LEFT SIDEFLEXING CHAIN WITH BASE ROLLER CHAIN, PITCH 19.05mm (3/4")

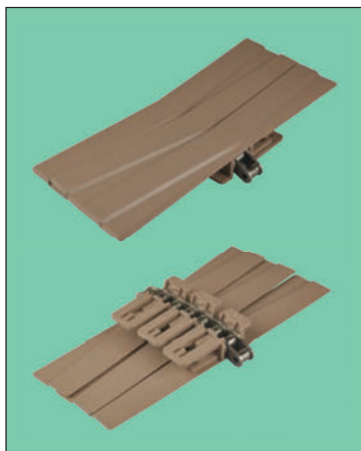

链轮 Sprocket

Page C21/C22

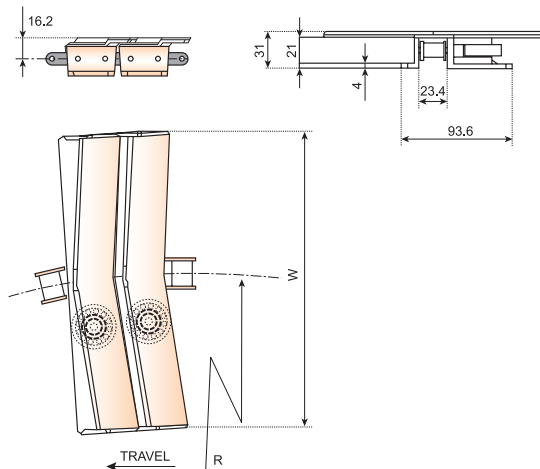

链号 Chain No.	宽度 Width (W)		重量 Weight		最小侧弯半径 Minimum Radius mm
	mm	inch	kg/m	lbs/ft	
3873 - L - K1000	254	10.00	4.52	1.78	457
3873 - L - K1200	304.8	12.00	4.81	1.89	457

- 适用于各种高速转弯输送，如食品工业，餐盘输送等长距离输送线。
- 链条设计是由底链扣住塑钢顶板片而成。
- 底链材质：
 - 不锈钢/碳钢
- 最大输送长度和最大负载拉力：
 - 不锈钢：24米 ≤2000N
 - 碳钢：30米 ≤4000N
- 最高速度：
 - 润滑剂 90米/分钟
 - 干燥 60米/分钟
- 包装：
 - 10英尺 = 3.048 米/盒 1米 = 26片
- Suitable for various high-speed curved conveyance applications, such as long-distance conveyor lines in the food industry and tray conveyance.
- The chain design consists of the base chain holding the plastic steel top plate.
- Base roller chain material:
 - Stainless steel SUS304 / Carbon steel
- Max. conveying length and tensile strength:
 - Stainless steel: 24 m ≤2000N
 - Carbon steel: 30 m ≤4000N
- Max. speed:
 - Lubricated: 90 m/min
 - Dry: 60 m/min
- Packaging:
 - 10 ft = 3.048 m/box 1 m = 26 pieces


3873-R 无间隙右转弯输送链板

3873-R CLOSED SURFACE RIGHT SIDEFLEXING CHAIN WITH BASE ROLLER CHAIN, PITCH 19.05mm (3/4")



链轮 Sprocket

Page C21/C22

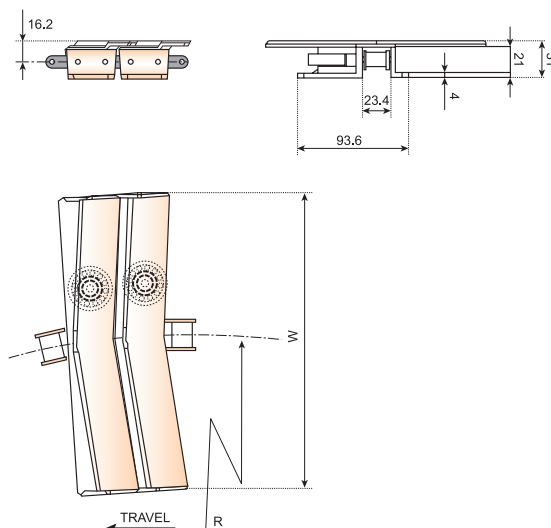




链号 Chain No.	宽度 Width (W)		重量 Weight		最小侧弯半径 Minimum Radius mm
	mm	inch	kg/m	lbs/ft	
3873 - R - K1000	254	10.00	4.52	1.78	457
3873 - R - K1200	304.8	12.00	4.81	1.89	457

- 适用于各种高速转弯输送，如食品工业，餐盘输送等长距离输送线。
- 链条设计是由底链扣住塑钢顶板片而成。
- 底链材质：
 - 不锈钢/碳钢
- 最大输送长度和最大负载拉力：
 - 不锈钢：24米 ≤2000N
 - 碳钢：30米 ≤4000N
- 最高速度：
 - 润滑剂 90米/分钟
 - 干燥 60米/分钟
- 包装：
 - 10英尺 = 3.048 米/盒 1米 = 26片
- Suitable for various high-speed curved conveyance applications, such as long-distance conveyor lines in the food industry and tray conveyance.
- The chain design consists of the base chain holding the plastic steel top plate.
- Base roller chain material:
 - Stainless steel SUS304 / Carbon steel
- Max. conveying length and tensile strength:
 - Stainless steel: 24 m ≤2000N
 - Carbon steel: 30 m ≤4000N
- Max. speed:
 - Lubricated: 90 m/min
 - Dry: 60 m/min
- Packaging:
 - 10 ft = 3.048 m/box 1 m = 26 pieces

扣链式输送带 Plastic Conveyor Chains With Base Roller Chains

863 (963) 扣链式直行输送带

863 (963) STRAIGHT RUNNING PLASTIC CHAIN WITH BASE ROLLER CHAIN, PITCH 19.05mm (3/4")

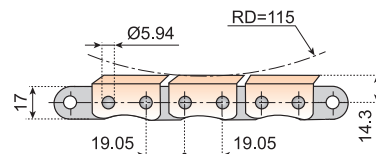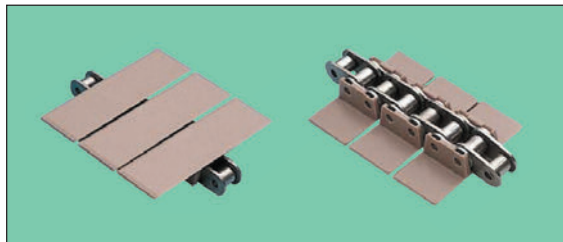


链号 Chain No.	宽度 Width (W)	
	mm	inch
LF863(963) - K325	82.5	3.25
LF863(963) - K450	114.3	4.50
LF863(963) - K600	152.4	6.00
LF863(963) - K750	190.5	7.50






链轮 Sprocket
Page C21/C22

963 链条配转弯基链
963 Paired with side bow base chain

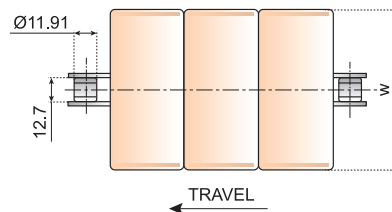

843 扣链式直行输送带


843 STRAIGHT RUNNING PLASTIC CHAIN WITH BASE ROLLER CHAIN, PITCH 12.7mm (1/2")

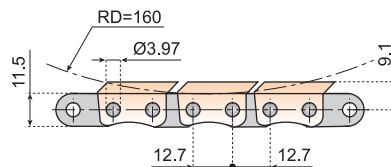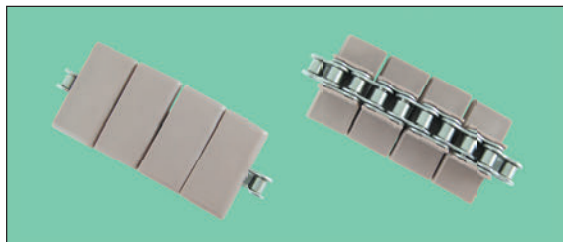

链号 Chain No.	宽度 Width (W)	
	mm	inch
LF843 - K118	28.6	1.18
LF843 - K138	35.1	1.38
LF843 - K200	50.8	2.00
LF843 - K325	82.6	3.25






链轮 Sprocket
Page C21/C22

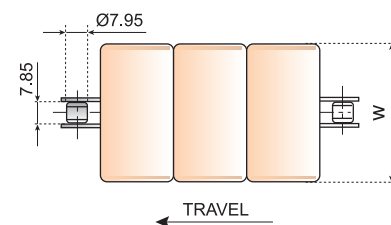

845 扣链式直行输送带


845 STRAIGHT RUNNING PLASTIC CHAIN WITH BASE ROLLER CHAIN, PITCH 12.7mm (1/2")

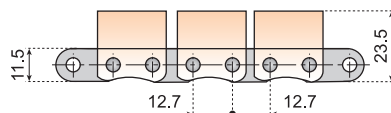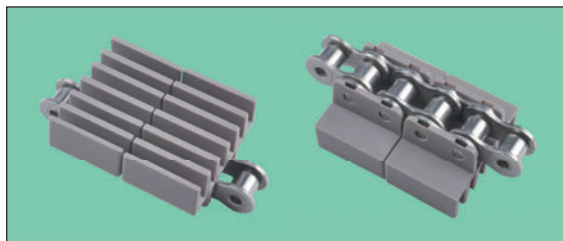

链号 Chain No.	宽度 Width (W)	
	mm	inch
LF845 - K110	27.94	1.10
LF845 - K137	34.80	1.37
LF845 - K150	38.10	1.50
LF845 - K160	40.64	1.60
LF845 - K200	50.80	2.00




链轮 Sprocket
Page C21/C22

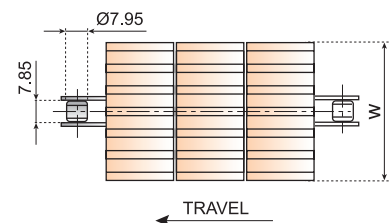


扣链式输送链 *Plastic Conveyor Chains With Base Roller Chains*

1843 扣链式转弯输送链

1843 SIDEFLEXING PLASTIC CHAIN WITH BASE ROLLER CHAIN, PITCH 12.7mm (1/2")





链轮 Sprocket
Page C21/C22

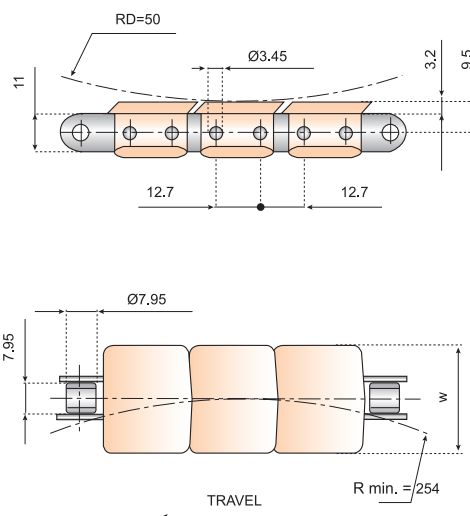


链号 Chain No.	宽度 Width (W)	
	mm	inch
LF1843 - K125	31.8	1.25
LF1843 - K200	50.8	2

1843G3 扣链式转弯输送链

1843G3 SIDEFLEXING PLASTIC CHAIN WITH BASE ROLLER CHAIN, PITCH 12.7mm (1/2")

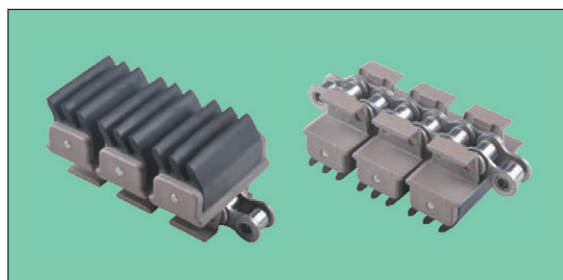

链轮 Sprocket
Page C21/C22

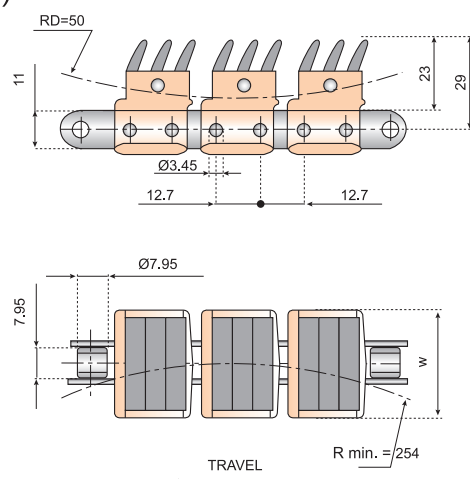

链号 Chain No.	宽度 Width (W)	
	mm	inch
1843G3 - K178	45.22	1.78

