





塑料链轮 Plastic Sprockets

40/50/60 链轮 (机加工)
PLASTIC SPROCKET FOR CHAIN 40/50/60 (MACHINED)



材质 Material: PA6 / POM




	编号 CODE	齿数 Z	外径 Do (mm)	齿宽 Teeth Width h1 (mm)	总厚 Overall Length H (mm)	凸台外径 Hub dia. d (mm)	孔径 DF (mm)
40 (08A) 链轮 Sprocket 节距 Pitch: 12.7mm 内节内宽 Inner Width: 7.95mm 滚子直径 Roller Dia.: 7.95mm	40P - 14T	14	63	7.2	22	40	20/25
	40P - 15T	15	67	7.2	22	40	20/25
	40P - 16T	16	71	7.2	22	40	20/25
	40P - 17T	17	76	7.2	22	40	20/25
	40P - 18T	18	80	7.2	22	40	20/25
	40P - 19T	19	84	7.2	22	40	20/25
	40P - 20T	20	88	7.2	25	60	20/25/30
	40P - 21T	21	92	7.2	25	60	20/25/30
	40P - 22T	22	96	7.2	25	60	20/25/30
	40P - 23T	23	100	7.2	25	60	20/25/30
	40P - 24T	24	104	7.2	25	60	20/25/30
50 (10A) 链轮 Sprocket 节距 Pitch: 15.875mm 内节内宽 Inner Width: 9.53mm 滚子直径 Roller Dia.: 10.16mm	50P - 14T	14	79	8.7	25	45	20/25
	50P - 15T	15	84	8.7	25	45	20/25
	50P - 16T	16	89	8.7	25	50	20/25
	50P - 17T	17	94	8.7	25	50	20/25/30
	50P - 18T	18	100	8.7	28	50	20/25/30
	50P - 19T	19	105	8.7	28	50	20/25/30
	50P - 20T	20	110	8.7	28	50	20/25/30
	50P - 21T	21	115	8.7	28	50	20/25/30
	50P - 22T	22	120	8.7	28	70	20/25/30/35
	50P - 23T	23	125	8.7	28	70	20/25/30/35
	50P - 24T	24	130	8.7	28	70	20/25/30/35/40
60 (12A) 链轮 Sprocket 节距 Pitch: 19.05mm 内节内宽 Inner Width: 12.7mm 滚子直径 Roller Dia.: 11.91mm	60P - 12T	12	83	11.5	30	45	20/25
	60P - 13T	13	89	11.5	30	45	20/25
	60P - 14T	14	95	11.5	30	50	20/25
	60P - 15T	15	101	11.5	30	50	20/25/30
	60P - 16T	16	107	11.5	32	50	20/25/30
	60P - 17T	17	113	11.5	32	50	20/25/30
	60P - 18T	18	119	11.5	32	50	20/25/30
	60P - 19T	19	126	11.5	32	50	20/25/30
	60P - 20T	20	132	11.5	32	70	20/25/30/35
	60P - 21T	21	138	11.5	32	70	20/25/30/35
	60P - 22T	22	144	11.5	32	70	20/25/30/35/40
	60P - 23T	23	150	11.5	32	70	20/25/30/35/40
	60P - 24T	24	156	11.5	32	70	20/25/30/35/40
	60P - 25T	25	162	11.5	35	70	20/25/30/35/40

* 链槽尺寸按国际标准。
* 链轮总厚度、凸台尺寸等均可按客户要求加工。
* 请联系我们索取更详尽的链轮设计资料，我们有专业的链轮样本供您参考。

* The keyway dimensions comply with international standards.
* Overall Length (L) and Hub Diam. (d), etc., can be machined according to customer requirements.
* Please request more detailed sprocket design information from us.

钢质链轮 Steel Sprockets

40 钢质链轮 40 STEEL SPROCKET

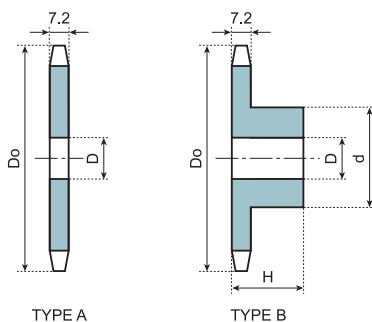


链轮适用于 843/845/1843 系列链条
FOR CHAIN 843/845/1843

注:		Note:	
节距	12.7 mm	Pitch	12.7 mm
内节链内宽	7.95 mm	Inner Width	7.95 mm
滚子直径	7.95 mm	Roller Ø	7.95 mm
齿宽	7.2 mm	Tooth Width	7.2 mm

材质: 碳钢或不锈钢 (也可以按此标准生产塑料材质链轮)
Material: Carbon Steel or Stainless Steel (plastic material also available)

编号 CODE	TYPE A			TYPE B				
	外径 Do Outer dia. (mm)	节径 Dp Pitch dia. (mm)	孔径 D Bore dia. (mm)	外径 Do Outer dia. (mm)	节径 Dp Pitch dia. (mm)	孔径 D Bore dia. (mm)	凸台直径 d Hub dia. (mm)	总长 H Overall Length (mm)
13T	59	53.07	13.5	59	53.07	13.5	37	22
14T	63	57.07	13.5	63	57.07	13.5	42	22
15T	67	61.08	13.5	67	61.08	13.5	46	22
16T	71	65.10	13.5	71	65.10	13.5	50	22
17T	76	69.12	13.5	76	69.12	13.5	54	22
18T	80	73.14	13.5	80	73.14	13.5	57	22
19T	84	77.16	13.5	84	77.16	13.5	62	22
20T	88	81.18	14	88	81.18	14	67	25
21T	92	85.21	14	92	85.21	14	71	25
22T	96	89.24	14	96	89.24	14	75	25
23T	100	93.27	14	100	93.27	14	77	25
24T	104	97.30	14	104	97.30	14	63	25
25T	108	101.33	14	108	101.33	14	63	25
26T	112	105.36	14	112	105.36	14	63	25
27T	116	109.40	14	116	109.40	14	63	25
28T	120	113.43	14	120	113.43	14	63	25
29T	124	117.46	14	124	117.46	14	63	25
30T	128	121.50	14	128	121.50	14	63	25

60 钢质链轮 60 STEEL SPROCKET

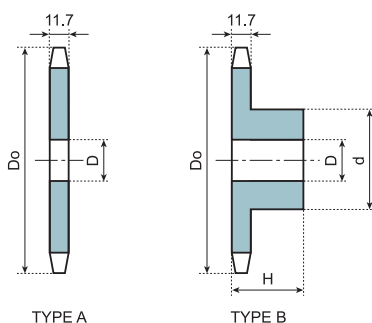

链轮适用于 863/963/1864/1873/1874/3873 系列链条
FOR CHAIN 863/963/1864/1873/1874/3873

注:		Note:	
节距	19.05 mm	Pitch	19.05 mm
内节链内宽	12.70 mm	Inner Width	12.70 mm
滚子直径	11.91 mm	Roller Ø	11.91 mm
齿宽	11.70 mm	Tooth Width	11.70 mm

材质: 碳钢或不锈钢 (也可以按此标准生产塑料材质链轮)
Material: Carbon Steel or Stainless Steel (plastic material also available)

编号 CODE	TYPE A			TYPE B				
	外径 Do Outer dia. (mm)	节径 Dp Pitch dia. (mm)	孔径 D Bore dia. (mm)	外径 Do Outer dia. (mm)	节径 Dp Pitch dia. (mm)	孔径 D Bore dia. (mm)	凸台直径 d Hub dia. (mm)	总长 H Overall Length (mm)
13T	89	79.60	14	89	79.60	14	57	32
14T	95	85.61	16	95	85.61	16	62	32
15T	101	91.62	16	101	91.62	16	68	32
16T	107	97.65	16	107	97.65	16	73	32
17T	113	103.67	16	113	103.67	16	73	32
18T	119	109.71	16	119	109.71	16	83	40
19T	126	115.74	16	126	115.74	16	83	40
20T	132	121.78	16	132	121.78	16	83	40
21T	138	127.82	16	138	127.82	16	83	40
22T	144	133.86	16	144	133.86	16	83	40
23T	150	139.90	16	150	139.90	16	83	40
24T	156	145.95	16	156	145.95	16	83	40
25T	162	151.99	16	162	151.99	16	83	40
26T	168	158.04	16	168	158.04	16	83	40
27T	174	164.09	20	174	164.09	20	83	40
28T	180	170.14	20	180	170.14	20	83	40
29T	187	176.20	20	187	176.20	20	83	40
30T	193	182.25	20	193	182.25	20	83	40