



www.net-conveyor.com



www.net-conveyor.com




www.net-conveyor.com



www.net-conveyor.com

CHAINS, BELTS & COMPONENTS



不锈钢平顶链

STAINLESS STEEL FLAT TOP CHAINS




不锈钢滚子链

STAINLESS STEEL ROLLER CHAINS

不锈钢平顶链 Stainless Steel Flat Top Chains

SS812/815 单铰直输平顶链

SS812/815 SINGLE HINGE STRAIGHT RUNNING CHAIN



链轮 Sprocket

Page C2/C3





链号 Chain No.	宽度 Width (W)		重量 Weight		链板间隙 Plate Gap (PG)
	mm	inch	kg/m	lbs/ft	mm
SS812/815 - K205	53	2.05	2.1	1.42	1.8
SS812/815 - K250	63.5	2.50	2.3	1.55	1.8
SS812/815 - K263	66.8	2.63	2.4	1.62	1.8
SS812/815 - K300	76.2	3.00	2.5	1.68	1.8
SS812/815 - K325	82.6	3.25	2.6	1.75	1.8
SS812/815 - K350	88.9	3.50	2.7	1.81	1.8
SS812/815 - K400	101.6	4.00	3.2	2.15	1.8
SS812/815 - K450	114.3	4.50	3.5	2.35	1.8
SS812/815 - K500	127	5.00	3.6	2.42	1.8
SS812/815 - K600	152.4	6.00	4.4	2.96	1.8
SS812/815 - K750	190.5	7.50	5.3	3.56	1.8

- 主要适用于各种玻璃瓶以及重负载金属类输送。
- 最适合啤酒制造业。
- 建议使用润滑剂。
- 最大输送长度：15米
- 最高速度：
 - 润滑剂 90米/分钟
 - 干燥 60米/分钟
- 工作载荷：5400N
- 材质：
 - 奥氏体不锈钢 SS301/SS304 (无磁性的)
 - 铁素体不锈钢 SS420/SS430 (有磁性的)
- 包装：
 - 10英尺 = 3.048 米/盒
 - 1米 = 26片

- Primarily suitable for various types of glass bottles and heavy-duty metal conveyor lines.
- Ideal for the beer manufacturing industry.
- Lubricant recommended.
- Max. conveying length: 15 m
- Max. speed:
 - Lubricated: 90 m/min
 - Dry: 60 m/min
- Working load: 5400N
- Material:
 - Austenitic stainless steel (non-magnetic)
 - Ferritic stainless steel (magnetic)
- Packaging:
 - 10 ft = 3.048 m/box
 - 1 m = 26 pieces

SS802/805 双铰直输平顶链

SS802/805 DOUBLE HINGE STRAIGHT RUNNING CHAIN

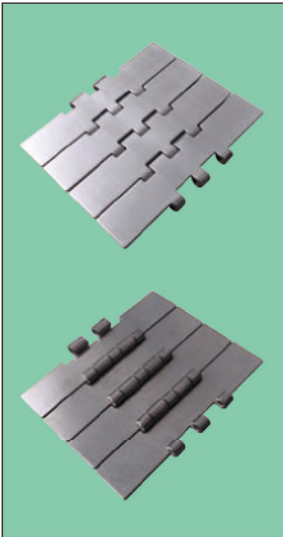

链轮 Sprocket

Page C4

链号 Chain No.	宽度 Width (W)		重量 Weight		链板间隙 Plate Gap (PG)
	mm	inch	kg/m	lbs/ft	mm
SS802/805 - K750	190.5	7.50	5.9	3.97	1.8
SS802/805 - K1000	254	10	7.2	4.8	1.8
SS802/805 - K1200	304.8	12	8.3	5.6	1.8



- 主要适用于各种玻璃瓶以及重负载金属类输送。
- 最适合啤酒制造业。
- 建议使用润滑剂。
- 最大输送长度：15米
- 最高速度：
 - 润滑剂 90米/分钟
 - 干燥 60米/分钟
- 工作载荷：8900N
- 材质：
 - 奥氏体不锈钢 SS301/SS304 (无磁性的)
 - 铁素体不锈钢 SS420/SS430 (有磁性的)
- 包装：
 - 10英尺 = 3.048 米/盒
 - 1米 = 26片

- Primarily suitable for various types of glass bottles and heavy-duty metal conveyor lines.
- Ideal for the beer manufacturing industry.
- Lubricant recommended.
- Max. conveying length: 15 m
- Max. speed:
 - Lubricated: 90 m/min
 - Dry: 60 m/min
- Working load: 8900N
- Material:
 - Austenitic stainless steel (non-magnetic)
 - Ferritic stainless steel (magnetic)
- Packaging:
 - 10 ft = 3.048 m/box
 - 1 m = 26 pieces

不锈钢平顶链 *Stainless Steel Flat Top Chains*

SS512/515 小节距单铰直输平顶链

SS512/515 SINGLE HINGE STRAIGHT RUNNING CHAIN, PITCH 25.4 mm (1")

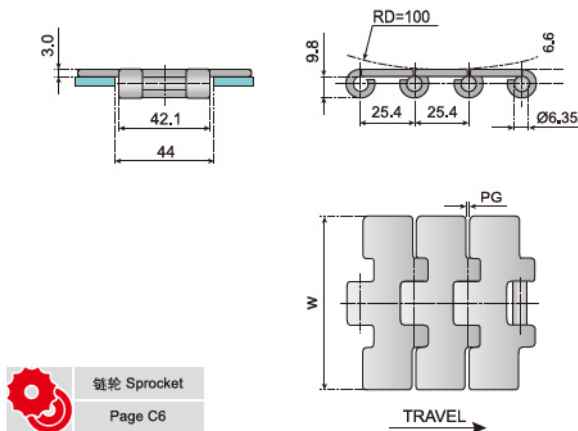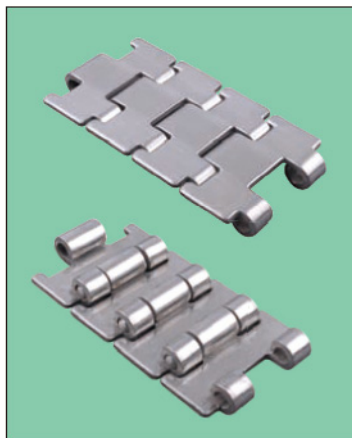

链轮 Sprocket

Page C6


链号 Chain No.	宽度 Width (W)		重量 Weight		链板间隙 Plate Gap (PG)
	mm	inch	kg/m	lbs/ft	
SS512/515 - K217	55	2.17	2.1	1.42	1.6
SS512/515 - K250	63.5	2.50	2.3	1.55	1.6
SS512/515 - K283	72	2.83	2.4	1.62	1.6
SS512/515 - K325	82.6	3.25	2.5	1.68	1.6
SS512/515 - K350	88.9	3.50	2.6	1.75	1.6
SS512/515 - K385	98	3.85	2.7	1.81	1.6
SS512/515 - K400	101.6	4.00	3.2	2.15	1.6

- 主要适用于各种玻璃瓶以及重负载金属类输送。
- 最适合啤酒制造业。
- 建议使用润滑剂。
- 最大输送长度：15米
- 最高速度：
 - 润滑剂 90米/分钟
 - 干燥 60米/分钟
- 工作载荷：5000N
- 材质：
 - 奥氏体不锈钢 SS301/SS304 (无磁性的)
 - 铁素体不锈钢 SS420/SS430 (有磁性的)
- 包装：
 - 10英尺 = 3.048 米/盒
 - 1米 = 39片

- Primarily suitable for various types of glass bottles and heavy-duty metal conveyor lines.
- Ideal for the beer manufacturing industry.
- Lubricant recommended.
- Max. conveying length: 15 m
- Max. speed:
 - Lubricated: 90 m/min
 - Dry: 60 m/min
- Working load: 5000N
- Material:
 - Austenitic stainless steel (non-magnetic)
 - Ferritic stainless steel (magnetic)
- Packaging:
 - 10 ft = 3.048 m/box
 - 1 m = 39 pieces

SS812/815 MINI 型单铰直输平顶链

SS812/815 MINI SINGLE HINGE STRAIGHT RUNNING CHAIN

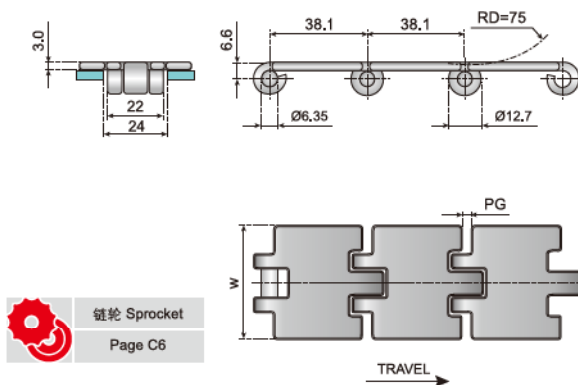

链轮 Sprocket

Page C6



链号 Chain No.	宽度 Width (W)		重量 Weight		链板间隙 Plate Gap (PG)
	mm	inch	kg/m	lbs/ft	
SS812/815 mini - K125	32	1.25	1.2	0.81	1.8
SS812/815 mini - K175	45	1.75	1.6	1.08	1.8

- 主要适用于各种玻璃瓶以及重负载金属类输送。
- 建议使用润滑剂。
- 最大输送长度：15米
- 最高速度：
 - 润滑剂 90米/分钟
 - 干燥 60米/分钟
- 工作载荷：3000N
- 材质：
 - 奥氏体不锈钢 SS301/SS304 (无磁性的)
 - 铁素体不锈钢 SS420/SS430 (有磁性的)
- 包装：
 - 10英尺 = 3.048 米/盒
 - 1米 = 26片
- Primarily suitable for various types of glass bottles and heavy-duty metal conveyor lines.
- Lubricant recommended.
- Max. conveying length: 15 m
- Max. speed:
 - Lubricated: 90 m/min
 - Dry: 60 m/min
- Working load: 3000N
- Material:
 - Austenitic stainless steel (non-magnetic)
 - Ferritic stainless steel (magnetic)
- Packaging:
 - 10 ft = 3.048 m/box
 - 1 m = 26 pieces

不锈钢平顶链 *Stainless Steel Flat Top Chains*

SS8157 重载单铰直输平顶链

SS8157 HEAVY DUTY SINGLE HINGE STRAIGHT RUNNING CHAIN

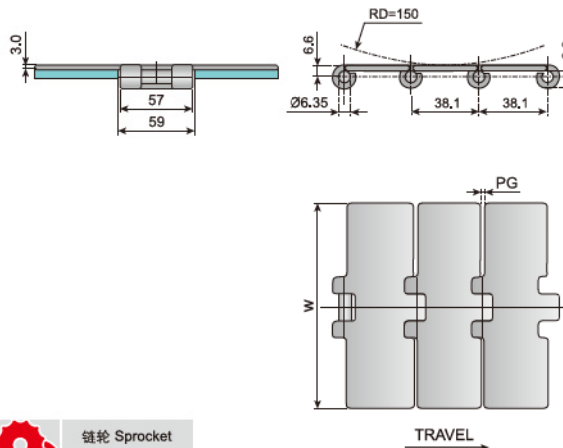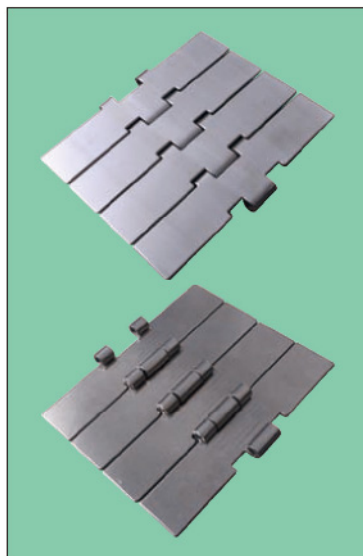

链轮 Sprocket


Page C5

链号 Chain No.	宽度 Width (W)		重量 Weight		链板间隙 Plate Gap (PG)
	mm	inch	kg/m	lbs/ft	
SS8157 - K750	190,5	7,50	5,6	3,77	1,8

- 主要适用于各种玻璃瓶以及重负载金属类输送。
- 最适合啤酒制造业。
- 最大输送长度：15米
- 最高速度（建议使用润滑剂）：
 - 润滑剂 90米/分钟
 - 干燥 60米/分钟
- 工作载荷：7000N
- 材质：
 - 奥氏体不锈钢 SS301/SS304（无磁性的）
 - 铁素体不锈钢 SS420/SS430（有磁性的）
- 包装：
 - 10英尺 = 3.048 米/盒
 - 1米 = 26片
- Primarily suitable for various types of glass bottles and heavy-duty metal conveyor lines.
- Ideal for the beer manufacturing industry.
- Max. conveying length: 15 m
- Max. speed (lubricant recommended) :
 - Lubricated: 90 m/min
 - Dry: 60 m/min
- Working load: 7000N
- Material:
 - Austenitic stainless steel (non-magnetic)
 - Ferritic stainless steel (magnetic)
- Packaging:
 - 10 ft = 3,048 m/box
 - 1 m = 26 pieces

SS8857M 无导型重载磁性转弯平顶链

SS8857M MAGNETIC HEAVY DUTY SIDEFLEXING CHAIN

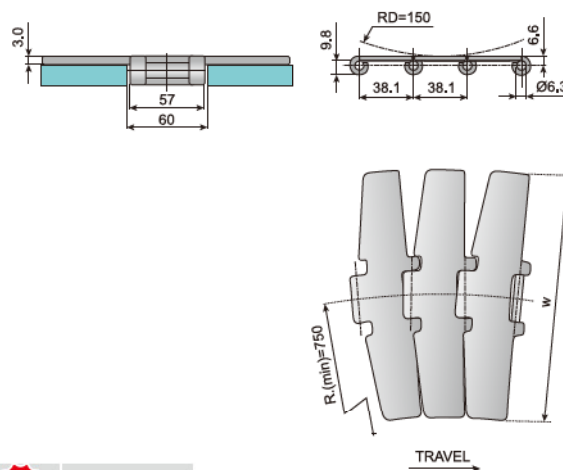

链轮 Sprocket

Page C5


链号 Chain No.	宽度 Width (W)		重量 Weight	
	mm	inch	kg/m	lbs/ft
SS8857M - K750	190,5	7,50	5,3	3,56

- 主要适用于各种玻璃瓶以及重负载金属类输送。
- 最适合啤酒制造业。
- 可选用弯导轨或转盘来转弯运输。
- 建议使用润滑剂。
- 最大输送长度：12米
- 工作载荷：7000N
- 材质：铁素体不锈钢 SS420/SS430（有磁性的）
- 包装：
 - 10英尺 = 3.048 米/盒
 - 1米 = 26片
- Primarily suitable for various types of glass bottles and heavy-duty metal conveyor lines.
- Ideal for the beer manufacturing industry.
- Optional corner tracks or turning disks for curved transport.
- Lubricant recommended.
- Max. conveying length: 12 m
- Working load: 7000N
- Material: Ferritic stainless steel (magnetic)
- Packaging:
 - 10 ft = 3,048 m/box
 - 1 m = 26 pieces



不锈钢平顶链 *Stainless Steel Flat Top Chains*

SS881TAB 有翼型转弯平顶链 SS881TAB SIDEFLEXING CHAIN

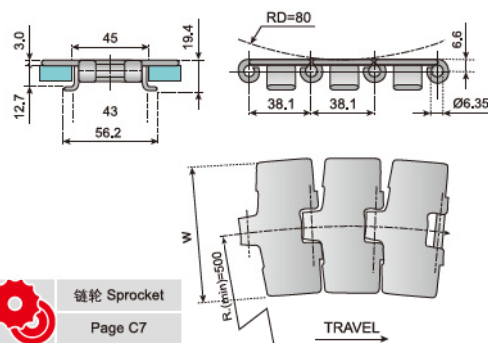

链轮 Sprocket
Page C7

- 主要适用于各种玻璃瓶以及重负载金属类输送。
- 最适合啤酒制造业。
- 可选用弯导轨或转盘来转弯运输。
- 建议使用润滑剂。
- 最大输送长度：12米
- 工作载荷：5400N
- 材质：
 - 铁素体不锈钢 SS420/SS430 (有磁性的)
- 包装：
 - 10英尺 = 3.048 米/盒
 - 1米 = 26片



链号 Chain No.	宽度 Width (W)		重量 Weight	
	mm	inch	kg/m	lbs/ft
SS881TAB - K325	82.6	3.25	3.1	2.09
SS881TAB - K450	114.3	4.50	3.6	2.42
SS881TAB - K600	152.4	6.00	4.6	3.09
SS881TAB - K750	190.5	7.50	5.3	3.56
SS881TAB - K1000	254	10	8	5.36
SS881TAB - K1200	304.8	12	9	6.04

- Primarily suitable for various types of glass bottles and heavy-duty metal conveyor lines.
- Ideal for the beer manufacturing industry.
- Optional corner tracks or turning disks for curved transport.
- Lubricant recommended.
- Max. conveying length: 12 m
- Working load: 5400N
- Material:

◦ Ferritic stainless steel (magnetic)

- Packaging:
 - 10 ft = 3.048 m/box
 - 1 m = 26 pieces

SS881 燕尾八字形转弯平顶链 SS881 BEVEL SIDEFLEXING CHAIN

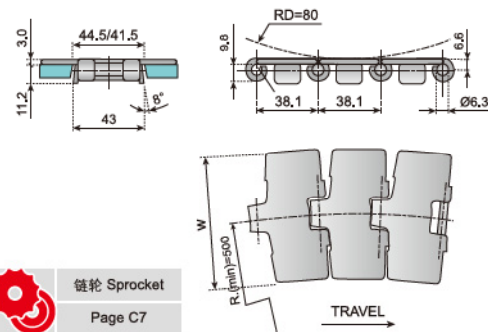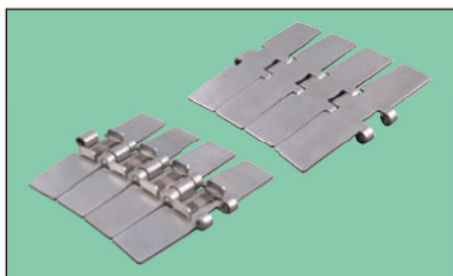


链轮 Sprocket
Page C7



链号 Chain No.	宽度 Width (W)		重量 Weight	
	mm	inch	kg/m	lbs/ft
SS881 - K325	82.6	3.25	2.9	1.95
SS881 - K450	114.3	4.50	3.8	2.56
SS881 - K600	152.4	6.00	4.3	2.89
SS881 - K750	190.5	7.50	5.1	3.43

SS881M 无导磁性转弯平顶链 SS881M MAGNETIC SIDEFLEXING CHAIN

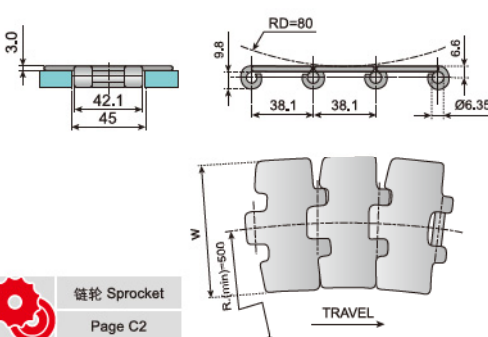

链轮 Sprocket
Page C2

- 主要适用于各种玻璃瓶以及重负载金属类输送。
- 最适合啤酒制造业。
- 可选用弯导轨或转盘来转弯运输。
- 建议使用润滑剂。
- 最大输送长度：12米
- 工作载荷：5400N
- 材质：铁素体不锈钢 SS420/SS430 (有磁性的)
- 包装：10英尺 = 3.048 米/盒 1米 = 26片




- Primarily suitable for various types of glass bottles and heavy-duty metal conveyor lines.
- Ideal for the beer manufacturing industry.
- Optional corner tracks or turning disks for curved transport.
- Lubricant recommended.
- Max. conveying length: 12 m
- Working load: 5400N
- Material: Ferritic stainless steel (magnetic)
- Packaging:
 - 10 ft = 3.048 m/box 1 m = 26 pieces

链号 Chain No.	宽度 Width (W)		重量 Weight	
	mm	inch	kg/m	lbs/ft
SS881M - K325	82.6	3.25	2.6	1.75
SS881M - K450	114.3	4.50	3.5	2.35
SS881M - K600	152.4	6.00	4.1	2.75
SS881M - K750	190.5	7.50	4.9	3.30

顶板链 Plate Top Chains

1864 直行顶板链, 基链节距 19.05mm (3/4")

1864 STRAIGHT RUNNING PLATE TOP CHAIN, PITCH 19.05mm (3/4")






链轮 Sprocket

Page C21/C22

链号 Chain No.	宽度 Width (W)		重量 Weight		载荷 Working Load N
	mm	inch	kg/m	lbs/ft	
	STEEL TOP PLATE / STEEL BASE CHAIN				
1864 - K325	82.5	3.25	3.33	2.24	4500
1864 - K450	114.3	4.50	4.00	2.69	4500
1864 - K600	152.4	6.00	4.40	2.95	4500
1864 - K750	190.5	7.50	4.80	3.22	4500
	STAINLESS STEEL TOP PLATE / STAINLESS STEEL BASE CHAIN				
1864 SS- K325	82.5	3.25	3.33	2.24	3400
1864 SS - K450	114.3	4.50	4.00	2.69	3400
1864 SS - K600	152.4	6.00	4.40	2.95	3400
1864 SS - K750	190.5	7.50	4.80	3.22	3400

1874TAB 转弯顶板链, 基链节距 19.05mm (3/4")

1874TAB SIDEFLEXING PLATE TOP CHAIN, PITCH 19.05mm (3/4")

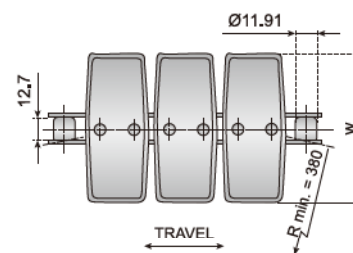

链轮 Sprocket

Page C21/C22

链号 Chain No.	宽度 Width (W)		重量 Weight		载荷 Working Load
	mm	inch	kg/m	lbs/ft	N
	STEEL TOP PLATE / STEEL BASE CHAIN				
1874 TAB - K325	82.5	3.25	3.33	2.24	4500
1874 TAB - K450	114.3	4.50	4.00	2.69	4500
1874 TAB - K600	152.4	6.00	4.40	2.95	4500
1874 TAB - K750	190.5	7.50	4.80	3.22	4500
	STAINLESS STEEL TOP PLATE / STAINLESS STEEL BASE CHAIN				
1874 TAB SS- K325	82.5	3.25	3.33	2.24	3400
1874 TAB SS - K450	114.3	4.50	4.00	2.69	3400
1874 TAB SS - K600	152.4	6.00	4.40	2.95	3400
1874 TAB SS - K750	190.5	7.50	4.80	3.22	3400

扣链式提升链/顶板链 Sideflexing Chains With Snap On Gripper / Welded Plate Top Chains




1874TAB-G 扣链式提升链

1874TAB-G SIDEFLEXING CHAIN WITH SNAP ON GRIPPER



链轮 Sprocket



Page C21/C22

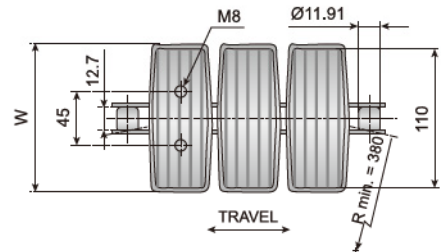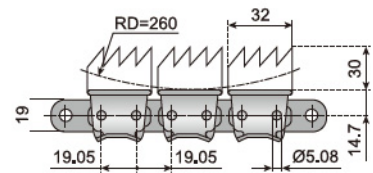

链号 Chain No.	宽度 Width (W)		重量 Weight		载荷 Working Load
	mm	inch	kg/m	lbs/ft	N
	STEEL TOP PLATE / STEEL BASE CHAIN				
1874 TAB - K325G	82.6	3.25	3.33	2.24	4500
1874 TAB - K450G	114.3	4.50	4.00	2.69	4500
1874 TAB - K600G	152.4	6.00	4.40	2.95	4500
1874 TAB - K750G	190.5	7.50	4.80	3.22	4500
	STAINLESS STEEL TOP PLATE / STAINLESS STEEL BASE CHAIN				
1874 TAB SS- K325G	82.6	3.25	3.33	2.24	3400
1874 TAB SS - K450G	114.3	4.50	4.00	2.69	3400
1874 TAB SS - K600G	152.4	6.00	4.40	2.95	3400
1874 TAB SS - K750G	190.5	7.50	4.80	3.22	3400

TPW 焊接顶板链



TPW WELDED PLATE TOP CHAIN

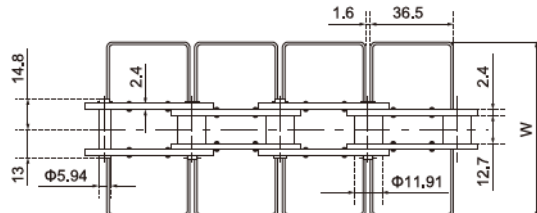

材质: 碳钢或不锈钢
Material: Carbon Steel or Stainless Steel

链号 Chain No.	宽度 Width (W)		重量 Weight	
	mm	inch	kg/m	lbs/ft
TPW - K217	55	2.17	2.7	1.82
TPW - K250	63.5	2.50	2.9	1.95
TPW - K300	76.2	3.00	3.2	2.15
TPW - K325	82.6	3.25	3.3	2.22
TPW - K375	95.3	3.75	3.6	2.42
TPW - K400	101.6	4.00	3.8	2.56
TPW - K450	114.3	4.50	4.0	2.69
TPW - K500	127	5.00	4.3	2.89
TPW - K600	152.4	6.00	5.0	3.36
TPW - K750	190.5	7.50	5.9	3.97



不锈钢平顶链(顶部带防滑胶) *Stainless Steel Chains With Rubber Top*

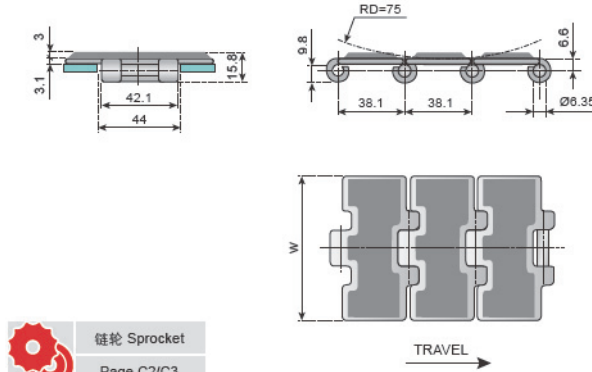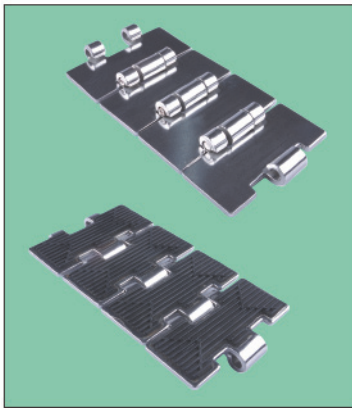

链轮 Sprocket
Page C2/C3

SS812/815G 防滑单铰直输平顶链
SS812/815G WITH RUBBER TOP


链号 Chain No.	宽度 Width (W)	
	mm	inch
SS812/815 - K325G	82.6	3.25
SS812/815 - K450G	114.3	4.50
SS812/815 - K750G	190.5	7.50

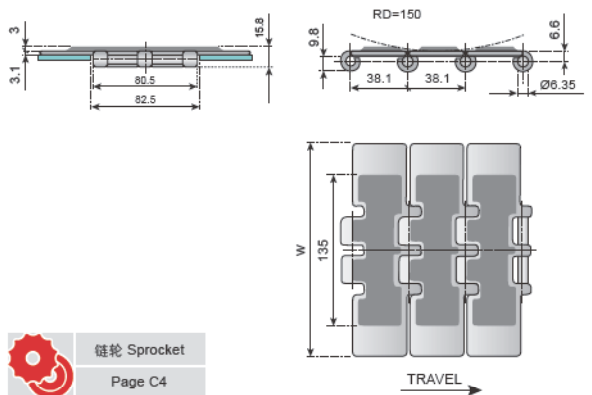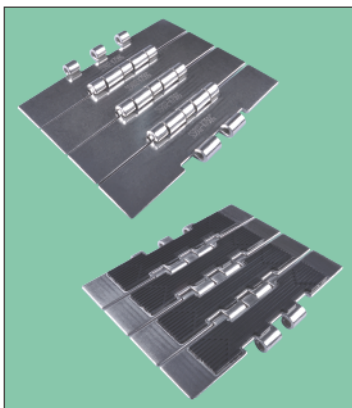

链轮 Sprocket
Page C4

SS802/805G 防滑双铰直输平顶链
SS802/805G WITH RUBBER TOP



链号 Chain No.	宽度 Width (W)	
	mm	inch
SS802/805 - K750G	190.5	7.50
SS802/805 - K1000G	254	10.00
SS802/805 - K1200G	304.8	12.00

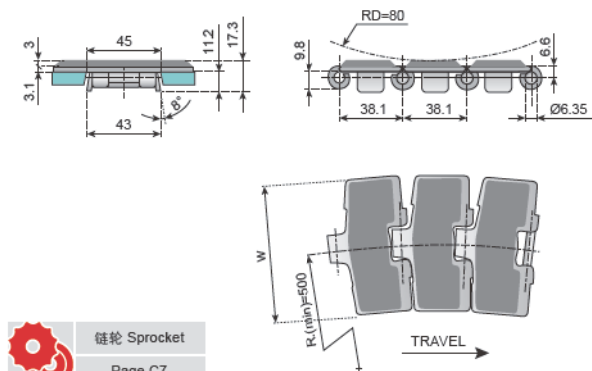

链轮 Sprocket
Page C7

SS881G 防滑侧弯平顶链
SS881G WITH RUBBER TOP

链号 Chain No.	宽度 Width (W)	
	mm	inch
SS881 - K325G	82.6	3.25
SS881 - K450G	114.3	4.50
SS881 - K600G	152.4	6.00
SS881 - K750G	190.5	7.50

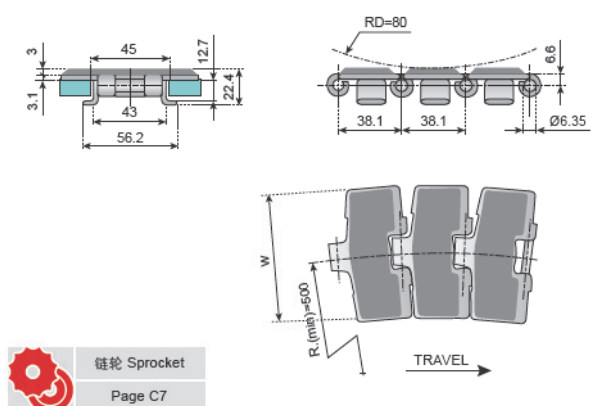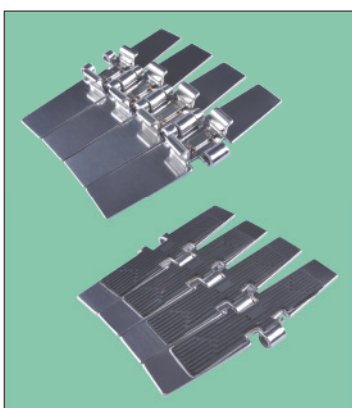

链轮 Sprocket
Page C7

SS881TAB-G 防滑侧弯平顶链
SS881TAB-G WITH RUBBER TOP

链号 Chain No.	宽度 Width (W)	
	mm	inch
SS881TAB - K325G	82.6	3.25
SS881TAB - K450G	114.3	4.50
SS881TAB - K600G	152.4	6.00
SS881TAB - K750G	190.5	7.50
SS881TAB - K1000G	254	10.0
SS881TAB - K1200G	304.8	12.00



DISTRIBUTOR

地址: 江苏省常州市龙城大道2188号新闸科技工业园2号楼
 Add: Building No.2, Xinzha Hi-tech Industrial Park
 No.2188, Longcheng Ave., Changzhou, Jiangsu,
 China 213012
 电话: (Tel) +86-519-88166775, 86617695
 E-Mail: sales@net-conveyor.com
 Web: www.net-conveyor.com