




**CHAINS, BELTS & COMPONENTS**



输送配件：


底脚，脚架，脚套，轴套

**CONVEYOR COMPONENTS:  
FEET, SUPPORT BASES,  
TUBE ENDS, SHAFT COLLARS**

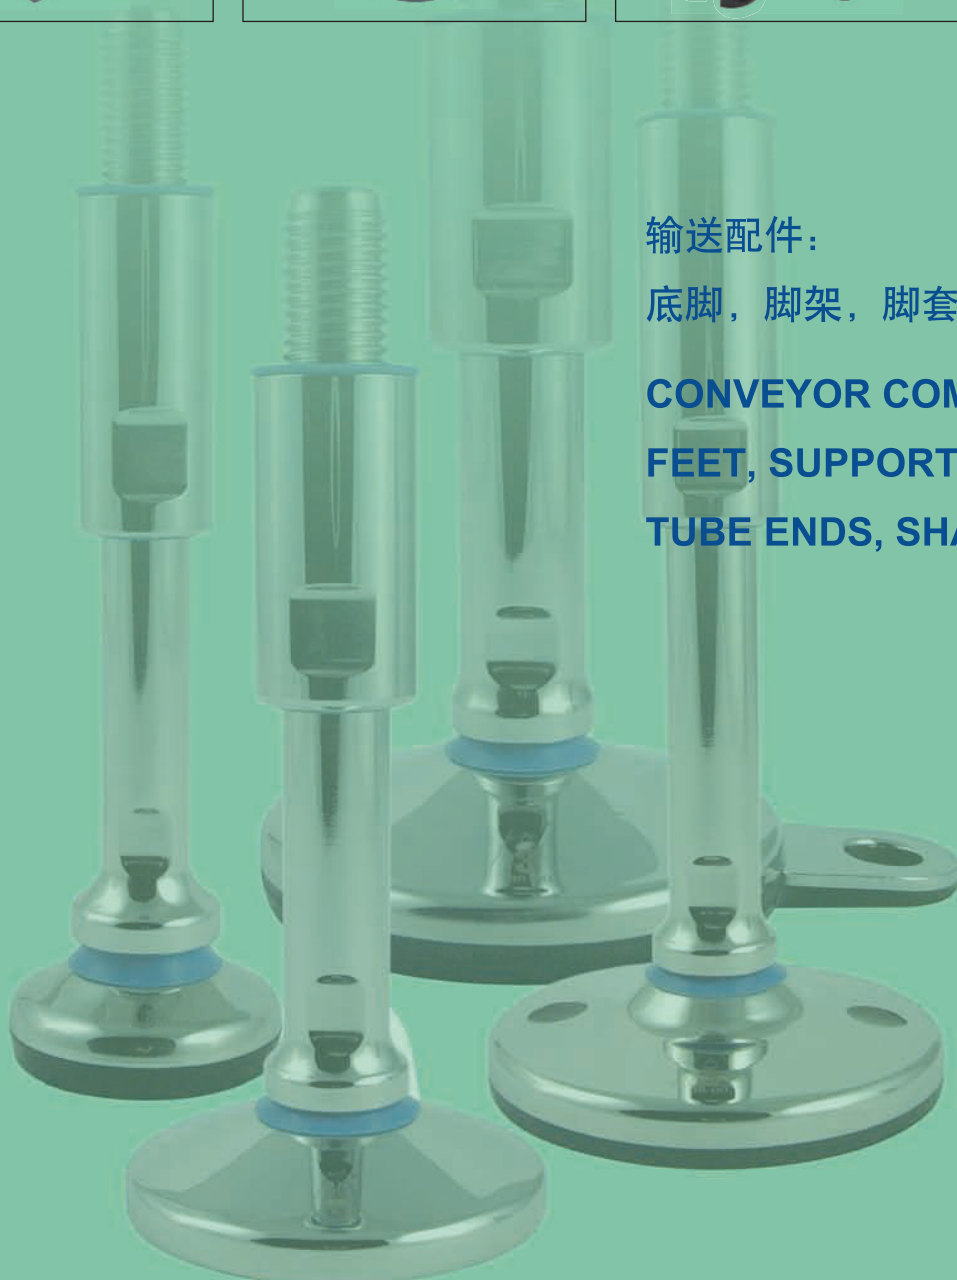

## 不锈钢底脚 *Stainless Steel Feet*

### SS50 不锈钢底脚 SS50 STAINLESS STEEL FEET

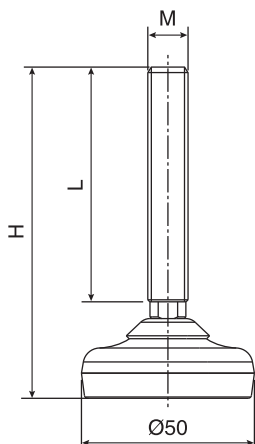


Unit: mm

编号 Code	螺纹直径 ( Dia. M )	总长度 Overall Length H	螺纹长度 Thread Length L
SS50-M12-L50	M12	85	50
SS50-M12-L75		110	75
SS50-M12-L100		135	100
SS50-M16-L50	M16	85	50
SS50-M16-L100		135	100
SS50-M16-L150		185	150
SS50-M20-L75	M20	110	75
SS50-M20-L100		135	100
SS50-M20-L150		185	150

脚盘、螺杆、垫圈材质：不锈钢  
Base, Spindle and Washer: Stainless Steel  
最大承重：3000N  
Max. Load: 3000N

### SS65 不锈钢底脚 SS65 STAINLESS STEEL FEET

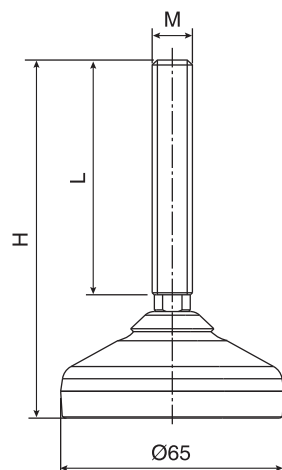


Unit: mm

编号 Code	螺纹直径 ( Dia. M )	总长度 Overall Length H	螺纹长度 Thread Length L
SS65-M12-L50	M12	85	50
SS65-M12-L75		110	75
SS65-M12-L100		135	100
SS65-M16-L50	M16	85	50
SS65-M16-L100		135	100
SS65-M16-L150		185	150
SS65-M20-L75	M20	110	75
SS65-M20-L100		135	100
SS65-M20-L150		185	150

脚盘、螺杆、垫圈材质：不锈钢  
Base, Spindle and Washer: Stainless Steel  
最大承重：5000N  
Max. Load: 5000N

### SS75 不锈钢底脚 SS75 STAINLESS STEEL FEET

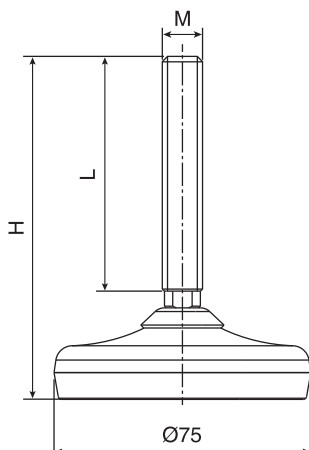

Unit: mm


编号 Code	螺纹直径 ( Dia. M )	总长度 Overall Length H	螺纹长度 Thread Length L
SS75-M12-L50	M12	85	50
SS75-M12-L75		110	75
SS75-M12-L100		135	100
SS75-M16-L50	M16	85	50
SS75-M16-L100		135	100
SS75-M16-L150		185	150
SS75-M20-L75	M20	110	75
SS75-M20-L100		135	100
SS75-M20-L150		185	150

脚盘、螺杆、垫圈材质：不锈钢  
Base, Spindle and Washer: Stainless Steel  
最大承重：8000N  
Max. Load: 8000N

## 不锈钢底脚 Stainless Steel Feet

### SS100 不锈钢底脚

#### SS100 STAINLESS STEEL FEET

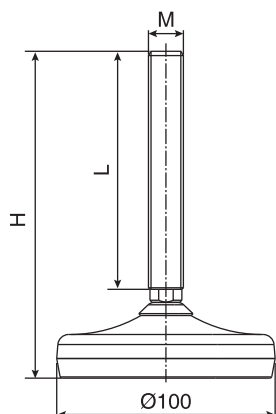

Unit: mm

编号 Code	螺纹直径 (Dia. M)	总长度 Overall Length H	螺纹长度 Thread Length L
SS100-M16-L50	M16	95	50
SS100-M16-L100		145	100
SS100-M16-L150		195	150
SS100-M20-L75	M20	120	75
SS100-M20-L100		145	100
SS100-M20-L150		195	150
SS100-M24-L75	M24	120	75
SS100-M24-L100		145	100
SS100-M24-L150		195	150

脚盘、螺杆、垫圈材质：不锈钢


Base, Spindle and Washer: Stainless Steel

最大承重：20000N

Max. Load: 20000N

### SS125 不锈钢底脚

#### SS125 STAINLESS STEEL FEET

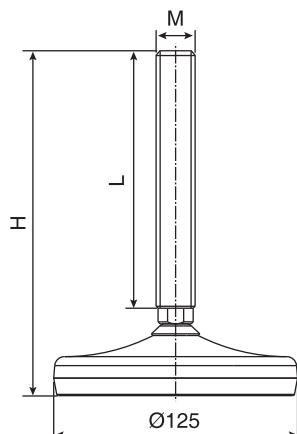

Unit: mm

编号 Code	螺纹直径 (Dia. M)	总长度 Overall Length H	螺纹长度 Thread Length L
SS125-M16-L100	M16	145	100
SS125-M16-L150		195	150
SS125-M20-L75	M20	120	75
SS125-M20-L100		145	100
SS125-M20-L150		195	150
SS125-M24-L75	M24	120	75
SS125-M24-L100		145	100
SS125-M24-L150		195	150
SS125-M30-L100	M30	145	100
SS125-M30-L150		195	150
SS125-M30-L200		245	200

脚盘、螺杆、垫圈材质：不锈钢


Base, Spindle and Washer: Stainless Steel

最大承重：30000N

Max. Load: 30000N

### SS150 不锈钢底脚

#### SS150 STAINLESS STEEL FEET

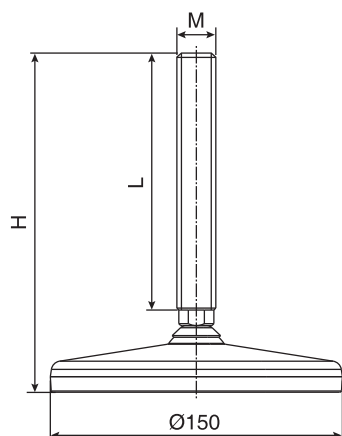

Unit: mm

编号 Code	螺纹直径 (Dia. M)	总长度 Overall Length H	螺纹长度 Thread Length L
SS150-M16-L100	M16	145	100
SS150-M16-L150		195	150
SS150-M20-L75	M20	120	75
SS150-M20-L100		145	100
SS150-M20-L150		195	150
SS150-M24-L75	M24	120	75
SS150-M24-L100		145	100
SS150-M24-L150		195	150
SS150-M30-L100	M30	145	100
SS150-M30-L150		195	150
SS150-M30-L200		245	200

脚盘、螺杆、垫圈材质：不锈钢

Base, Spindle and Washer: Stainless Steel


最大承重：35000N

Max. Load: 35000N



## 不锈钢底脚 *Stainless Steel Feet*

### SS180 不锈钢底脚 SS180 STAINLESS STEEL FEET

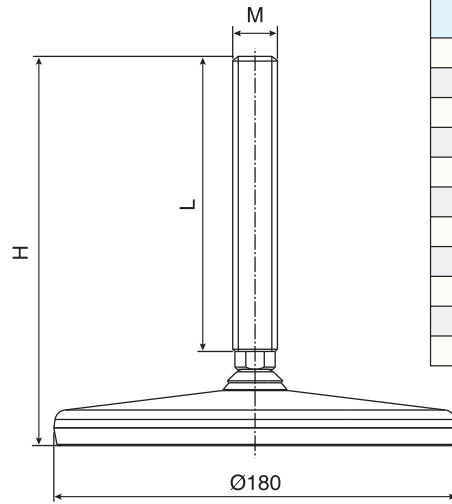

Unit: mm

编号 Code	螺纹直径 (Dia. M)	总长度 Overall Length H	螺纹长度 Thread Length L
SS180-M16-L100	M16	145	100
SS180-M16-L150		195	150
SS180-M20-L75		120	75
SS180-M20-L100	M20	145	100
SS180-M20-L150		195	150
SS180-M24-L75	M24	120	75
SS180-M24-L100		145	100
SS180-M24-L150		195	150
SS180-M30-L100	M30	145	100
SS180-M30-L150		195	150
SS180-M30-L200		245	200

脚盘、螺杆、垫圈材质：不锈钢  
Base, Spindle and Washer: Stainless Steel  
最大承重：38000N  
Max. Load: 38000N

更安全、更环保、更卫生，为您提供优质底脚系列。  
Safer, Greener, Cleaner - Elevating Your Standards with our Premium Base Series.

#### 不锈钢底脚系列 Stainless Steel Feet Line



#### USDA 级底脚系列 USDA Grade Feet Line




#### 3A 级底脚系列 Hygienic 3-A Grade Feet Line





不锈钢底脚(带固定孔) *Stainless Steel Feet with Fixing Hole*

SS75 不锈钢底脚(带固定孔)  
SS75 STAINLESS STEEL FEET WITH FIXING HOLE

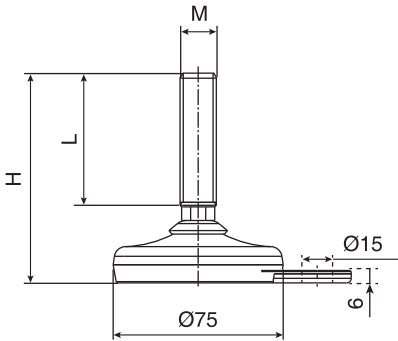


Unit: mm

编号 Code	螺纹直径 ( Dia. M )	总长度 Overall Length H	螺纹长度 Thread Length L
SS75FH-M12-L50	M12	85	50
SS75FH-M12-L75		110	75
SS75FH-M12-L100		135	100
SS75FH-M16-L50	M16	85	50
SS75FH-M16-L100		135	100
SS75FH-M16-L150		185	150
SS75FH-M20-L75	M20	110	75
SS75FH-M20-L100		135	100
SS75FH-M20-L150		185	150

脚盘、螺杆、垫圈材质：不锈钢  
Base, Spindle and Washer: Stainless Steel  
最大承重：8000N  
Max. Load: 8000N

SS100 不锈钢底脚(带固定孔)  
SS100 STAINLESS STEEL FEET WITH FIXING HOLE

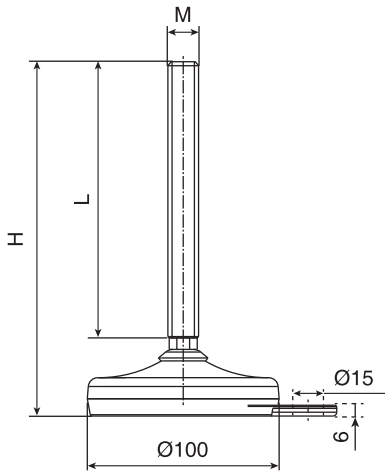

Unit: mm

编号 Code	螺纹直径 ( Dia. M )	总长度 Overall Length H	螺纹长度 Thread Length L
SS100FH-M16-L50	M16	95	50
SS100FH-M16-L100		145	100
SS100FH-M16-L150		195	150
SS100FH-M20-L75	M20	120	75
SS100FH-M20-L100		145	100
SS100FH-M20-L150		195	150
SS100FH-M24-L75	M24	120	75
SS100FH-M24-L100		145	100
SS100FH-M24-L150		195	150

脚盘、螺杆、垫圈材质：不锈钢  
Base, Spindle and Washer: Stainless Steel  
最大承重：20000N  
Max. Load: 20000N




STAINLESS STEEL FEET



## 塑料底盘万向关节调整底脚 *Plastic Base Articulated Feet*

### D40 塑料底盘万向关节调整底脚

#### D40 PLASTIC BASE ARTICULATED FEET



Unit: mm

编号 Code -C / -SS	螺纹直径 ( Dia. M )	螺纹长度 ( Length L )
D40-0850	M8	50
D40-0880	M8	80
D40-1050	M10	50
D40-10100	M10	100
D40-1250	M12	50
D40-12100	M12	100
D40-12150	M12	150

脚盘: 增强尼龙带橡胶垫; 螺杆螺母: 碳钢镀锌或不锈钢; 最大承重: 600Kg


Base: Reinforced Polyamide with Rubber Pad

Spindle and Nut: Nickel Plated Carbon Steel or Stainless Steel

Max. Load: 600Kg

### D50 塑料底盘万向关节调整底脚

#### D50 PLASTIC BASE ARTICULATED FEET



Unit: mm

编号 Code -C / -SS	螺纹直径 ( Dia. M )	螺纹长度 ( Length L )
D50-0850	M8	50
D50-0880	M8	80
D50-1050	M10	50
D50-10100	M10	100
D50-1250	M12	50
D50-12100	M12	100
D50-12150	M12	150

脚盘: 增强尼龙带橡胶垫; 螺杆螺母: 碳钢镀锌或不锈钢; 最大承重: 1000Kg


Base: Reinforced Polyamide with Rubber Pad

Spindle and Nut: Nickel Plated Carbon Steel or Stainless Steel

Max. Load: 1000Kg.

### D60 塑料底盘万向关节调整底脚

#### D60 PLASTIC BASE ARTICULATED FEET



Unit: mm

编号 Code -C / -SS	螺纹直径 ( Dia. M )	螺纹长度 ( Length L )
D60-0850	M8	50
D60-0880	M8	80
D60-1050	M10	50
D60-10100	M10	100
D60-1250	M12	50
D60-12100	M12	100
D60-12150	M12	150
D60-1650	M16	50
D60-16100	M16	100
D60-16150	M16	150
D60-20100	M20	100
D60-20150	M20	150
D60-24150	M24	150

脚盘: 增强尼龙带橡胶垫; 螺杆螺母: 碳钢镀锌或不锈钢; 最大承重: 1000Kg


Base: Reinforced Polyamide with Rubber Pad

Spindle and Nut: Nickel Plated Carbon Steel or Stainless Steel

Max. Load: 1000Kg

### D80A 塑料底盘万向关节调整底脚

#### D80A PLASTIC BASE ARTICULATED FEET



Unit: mm

编号 Code -C / -SS	螺纹直径 ( Dia. M )	螺纹长度 ( Length L )
D80A-0850	M8	50
D80A-0880	M8	80
D80A-1050	M10	50
D80A-10100	M10	100
D80A-1250	M12	50
D80A-12100	M12	100
D80A-12150	M12	150
D80A-1650	M16	50
D80A-16100	M16	100
D80A-16150	M16	150
D80A-20100	M20	100
D80A-20150	M20	150
D80A-24150	M24	150

脚盘: 增强尼龙带橡胶垫; 螺杆螺母: 碳钢镀锌或不锈钢; 最大承重: 1200Kg

Base: Reinforced Polyamide with Rubber Pad


Spindle and Nut: Nickel Plated Carbon Steel or Stainless Steel

Max. Load: 1200Kg.

## 塑料底盘万向关节调整底脚 *Plastic Base Articulated Feet*

### D80B 塑料底盘万向关节调整底脚

#### D80B PLASTIC BASE ARTICULATED FEET

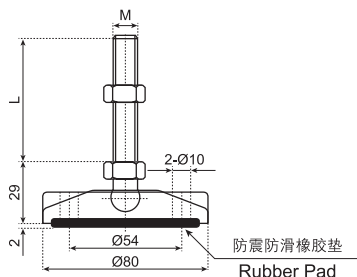

Unit: mm

编号 Code -C / -SS	螺纹直径 (Dia. M)	螺纹长度 (Length L)
D80B-0850	M8	50
D80B-0880	M8	80
D80B-1050	M10	50
D80B-10100	M10	100
D80B-1250	M12	50
D80B-12100	M12	100
D80B-12150	M12	150

脚盘: 增强尼龙带橡胶垫; 螺杆螺母: 碳钢镀镍或不锈钢; 最大承重: 1000Kg


Base: Reinforced Polyamide with Rubber Pad

Spindle and Nut: Nickel Plated Carbon Steel or Stainless Steel

Max. Load: 1000Kg

### D80C 塑料底盘万向关节调整底脚

#### D80C PLASTIC BASE ARTICULATED FEET

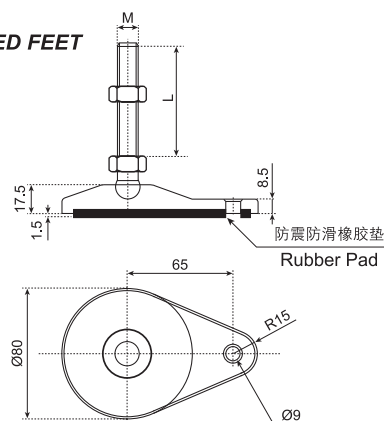

Unit: mm

编号 Code -C / -SS	螺纹直径 (Dia. M)	螺纹长度 (Length L)
D80C-0850	M8	50
D80C-0880	M8	80
D80C-1050	M10	50
D80C-10100	M10	100
D80C-1250	M12	50
D80C-12100	M12	100
D80C-12150	M12	150

脚盘: 增强尼龙带橡胶垫; 螺杆螺母: 碳钢镀镍或不锈钢; 最大承重: 600Kg


Base: Reinforced Polyamide with Rubber Pad

Spindle and Nut: Nickel Plated Carbon Steel or Stainless Steel

Max. Load: 600Kg

### D100 塑料底盘万向关节调整底脚

#### D100 PLASTIC BASE ARTICULATED FEET



Unit: mm

编号 Code -C / -SS	螺纹直径 (Dia. M)	螺纹长度 (Length L)
D100-1650	M16	50
D100-16100	M16	100
D100-16150	M16	150
D100-20100	M20	100
D100-20150	M20	150
D100-24150	M24	150

脚盘: 增强尼龙带橡胶垫; 螺杆螺母: 碳钢镀镍或不锈钢; 最大承重: 1500Kg


Base: Reinforced Polyamide with Rubber Pad

Spindle and Nut: Nickel Plated Carbon Steel or Stainless Steel

Max. Load: 1500Kg

### D125 塑料底盘万向关节调整底脚

#### D125 PLASTIC BASE ARTICULATED FEET

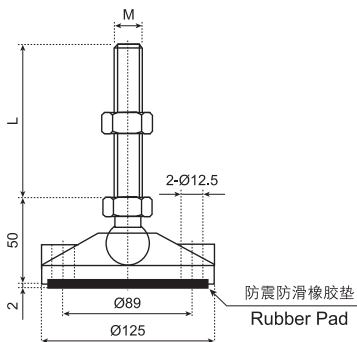

Unit: mm

编号 Code -C / -SS	螺纹直径 (Dia. M)	螺纹长度 (Length L)
D125-1650	M16	50
D125-16100	M16	100
D125-16150	M16	150
D125-20100	M20	100
D125-20150	M20	150
D125-24150	M24	150

脚盘: 增强尼龙带橡胶垫; 螺杆螺母: 碳钢镀镍或不锈钢; 最大承重: 1500Kg

Base: Reinforced Polyamide with Rubber Pad


Spindle and Nut: Nickel Plated Carbon Steel or Stainless Steel

Max. Load: 1500Kg



## 塑料底盘固定底脚 *Plastic Base Fixed Feet*

**FD50 塑料底盘固定底脚**  
**FD50 PLASTIC BASE FIXED FEET**

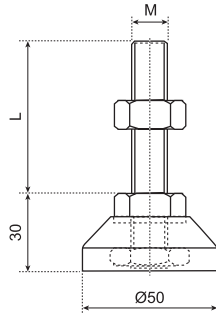

Unit: mm

编号 Code -C / -SS	螺纹直径 (Dia. M)	螺纹长度 (Length L)
FD50-0880	M8	80
FD50-1050	M10	50
FD50-10100	M10	100
FD50-1250	M12	50
FD50-12100	M12	100
FD50-12150	M12	150


脚盘: 增强尼龙; 螺杆螺母: 碳钢镀镍或不锈钢; 最大承重: 1000Kg

Base: Reinforced Polyamide

Spindle and Nut: Nickel Plated Carbon Steel or Stainless Steel

Max. Load: 1000Kg

**FD60 塑料底盘固定底脚**  
**FD60 PLASTIC BASE FIXED FEET**

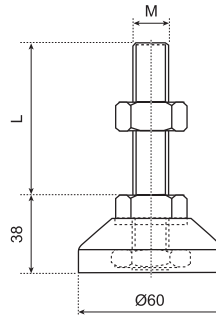

Unit: mm

编号 Code -C / -SS	螺纹直径 (Dia. M)	螺纹长度 (Length L)
FD60-1650	M16	50
FD60-16100	M16	100
FD60-16150	M16	150
FD60-20100	M20	100
FD60-20150	M20	150
FD60-24150	M24	150


脚盘: 增强尼龙; 螺杆螺母: 碳钢镀镍或不锈钢; 最大承重: 1200Kg

Base: Reinforced Polyamide

Spindle and Nut: Nickel Plated Carbon Steel or Stainless Steel

Max. Load: 1200Kg

**FD80 塑料底盘固定底脚**  
**FD80 PLASTIC BASE FIXED FEET**

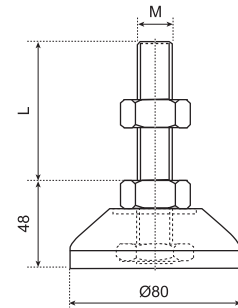

Unit: mm

编号 Code -C / -SS	螺纹直径 (Dia. M)	螺纹长度 (Length L)
FD80-1650	M16	50
FD80-16100	M16	100
FD80-16150	M16	150
FD80-20100	M20	100
FD80-20150	M20	150
FD80-24150	M24	150


脚盘: 增强尼龙; 螺杆螺母: 碳钢镀镍或不锈钢; 最大承重: 1200Kg

Base: Reinforced Polyamide

Spindle and Nut: Nickel Plated Carbon Steel or Stainless Steel

Max. Load: 1200Kg

**FD100 塑料底盘固定底脚**  
**FD100 PLASTIC BASE FIXED FEET**

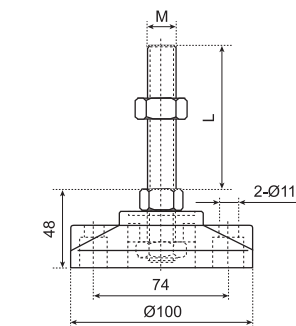

Unit: mm

编号 Code -C / -SS	螺纹直径 (Dia. M)	螺纹长度 (Length L)
FD100-16100	M16	100
FD100-16150	M16	150
FD100-20100	M20	100
FD100-20150	M20	150
FD100-20200	M20	200
FD100-24150	M24	150


脚盘: 增强尼龙; 螺杆螺母: 碳钢镀镍或不锈钢; 最大承重: 1500Kg

Base: Reinforced Polyamide

Spindle and Nut: Nickel Plated Carbon Steel or Stainless Steel

Max. Load: 1500Kg

**FD123 塑料底盘固定底脚**  
**FD123 PLASTIC BASE FIXED FEET**

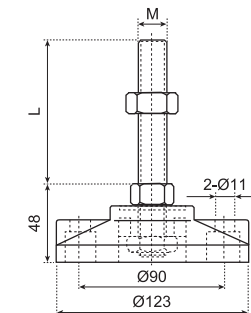

Unit: mm

编号 Code -C / -SS	螺纹直径 (Dia. M)	螺纹长度 (Length L)
FD123-1650	M16	50
FD123-16100	M16	100
FD123-16150	M16	150
FD123-20100	M20	100
FD123-20150	M20	150
FD123-24150	M24	150

脚盘: 增强尼龙; 螺杆螺母: 碳钢镀镍或不锈钢; 最大承重: 1500Kg

Base: Reinforced Polyamide


Spindle and Nut: Nickel Plated Carbon Steel or Stainless Steel

Max. Load: 1500Kg

## 金属万向调整底脚 *Metal Articulated Feet*

### MD50 金属调整底脚

#### MD50 METAL ARTICULATED FEET

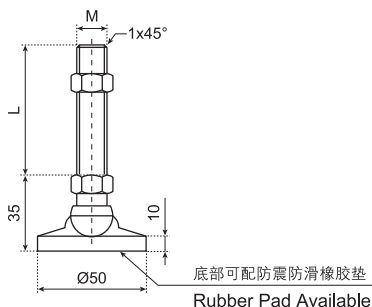


Unit: mm

编号 Code -C / -SS	螺纹直径 ( Dia. M )	螺纹长度 ( Length L )
MD50-1650	M16	50
MD50-16100	M16	100
MD50-16150	M16	150
MD50-20100	M20	100
MD50-20150	M20	150
MD50-24150	M24	150

脚盘、螺杆、螺母材质：碳钢镀锌或不锈钢；最大承重：3000Kg  
Base, Spindle and Nut: Nickel Plated Carbon Steel or Stainless Steel  
Max. Load: 3000Kg

### MD60 金属调整底脚

#### MD60 METAL ARTICULATED FEET

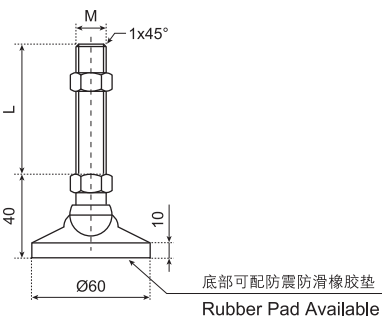


Unit: mm

编号 Code -C / -SS	螺纹直径 ( Dia. M )	螺纹长度 ( Length L )
MD60-1650	M16	50
MD60-16100	M16	100
MD60-16150	M16	150
MD60-20100	M20	100
MD60-20150	M20	150
MD60-24150	M24	150

脚盘、螺杆、螺母材质：碳钢镀锌或不锈钢；最大承重：3500Kg  
Base, Spindle and Nut: Nickel Plated Carbon Steel or Stainless Steel  
Max. Load: 3500Kg

### MD80 金属调整底脚

#### MD80 METAL ARTICULATED FEET

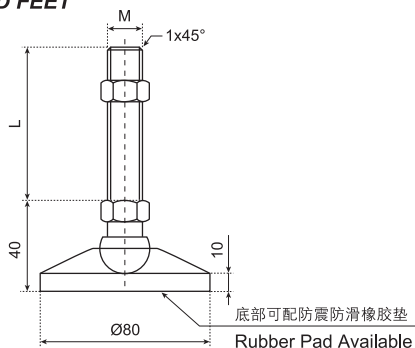


Unit: mm

编号 Code -C / -SS	螺纹直径 ( Dia. M )	螺纹长度 ( Length L )
MD80-1650	M16	50
MD80-16100	M16	100
MD80-16150	M16	150
MD80-20100	M20	100
MD80-20150	M20	150
MD80-24150	M24	150

脚盘、螺杆、螺母材质：碳钢镀锌或不锈钢；最大承重：4000Kg  
Base, Spindle and Nut: Nickel Plated Carbon Steel or Stainless Steel  
Max. Load: 4000Kg

### MD100 金属调整底脚

#### MD100 METAL ARTICULATED FEET

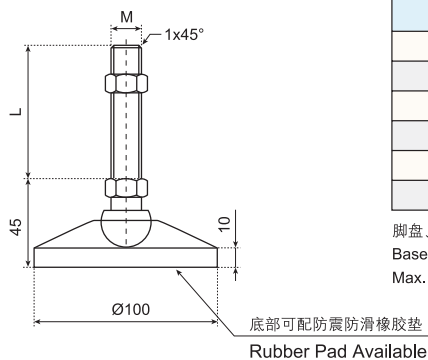

Unit: mm


编号 Code -C / -SS	螺纹直径 ( Dia. M )	螺纹长度 ( Length L )
MD100-1650	M16	50
MD100-16100	M16	100
MD100-16150	M16	150
MD100-20100	M20	100
MD100-20150	M20	150
MD100-24150	M24	150

脚盘、螺杆、螺母材质：碳钢镀锌或不锈钢；最大承重：4000Kg  
Base, Spindle and Nut: Nickel Plated Carbon Steel or Stainless Steel  
Max. Load: 4000Kg

底盘材质碳钢磷化发黑  
Black Phosphate Carbon Steel

## 金属固定底脚 *Metal Fixed Feet*

### MFD50 金属固定底脚 MFD50 METAL FIXED FEET

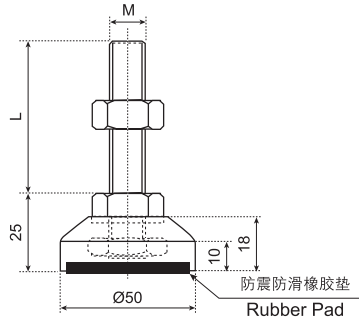


Unit: mm

编号 Code -C / -SS	螺纹直径 (Dia. M)	螺纹长度 (Length L)
MFD50-0880	M8	80
MFD50-1050	M10	50
MFD50-10100	M10	100
MFD50-1250	M12	50
MFD50-12100	M12	100
MFD50-12150	M12	150

脚盘、螺杆、螺母材质：不锈钢或碳钢镀锌或碳钢磷化发黑；最大承重：1500Kg  
Base, Spindle and Nut: Stainless Steel, Nickel Plated Carbon Steel, or Black Phosphate Carbon Steel

Max. Load: 1500Kg

### MFD60 金属固定底脚 MFD60 METAL FIXED FEET

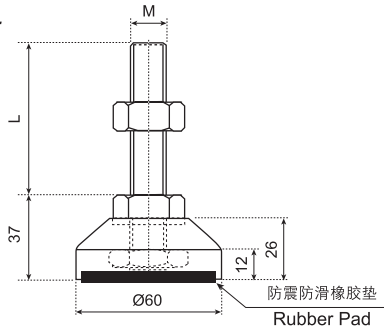


Unit: mm

编号 Code -C / -SS	螺纹直径 (Dia. M)	螺纹长度 (Length L)
MFD60-1650	M16	50
MFD60-16100	M16	100
MFD60-16150	M16	150
MFD60-2050	M20	50
MFD60-20100	M20	100
MFD60-20150	M20	150

脚盘、螺杆、螺母材质：不锈钢或碳钢镀锌或碳钢磷化发黑；最大承重：1500Kg  
Base, Spindle and Nut: Stainless Steel, Nickel Plated Carbon Steel, or Black Phosphate Carbon Steel

Max. Load: 1500Kg

### MFD80 金属固定底脚 MFD80 METAL FIXED FEET

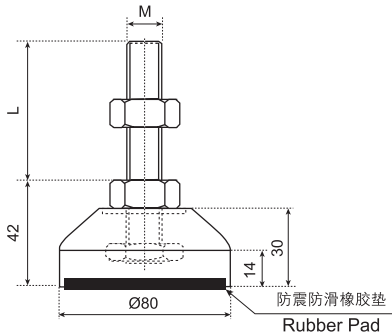


Unit: mm

编号 Code -C / -SS	螺纹直径 (Dia. M)	螺纹长度 (Length L)
MFD80-1650	M16	50
MFD80-16100	M16	100
MFD80-16150	M16	150
MFD80-2050	M20	50
MFD80-20100	M20	100
MFD80-20150	M20	150

脚盘、螺杆、螺母材质：不锈钢或碳钢镀锌或碳钢磷化发黑；最大承重：2000Kg  
Base, Spindle and Nut: Stainless Steel, Nickel Plated Carbon Steel, or Black Phosphate Carbon Steel

Max. Load: 2000Kg

### MFD100 金属固定底脚 MFD100 METAL FIXED FEET

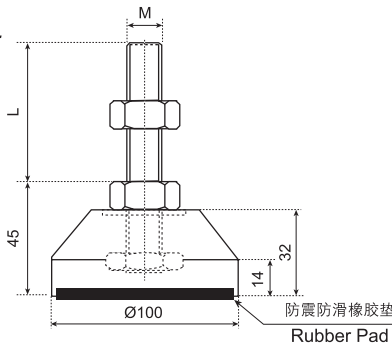


Unit: mm

编号 Code -C / -SS	螺纹直径 (Dia. M)	螺纹长度 (Length L)
MFD100-1650	M16	50
MFD100-16100	M16	100
MFD100-16150	M16	150
MFD100-2050	M20	50
MFD100-20100	M20	100
MFD100-20150	M20	150

脚盘、螺杆、螺母材质：不锈钢或碳钢镀锌或碳钢磷化发黑；最大承重：2500Kg  
Base, Spindle and Nut: Stainless Steel, Nickel Plated Carbon Steel, or Black Phosphate Carbon Steel

Max. Load: 2500Kg

### MFD150 金属固定底脚 MFD150 METAL FIXED FEET

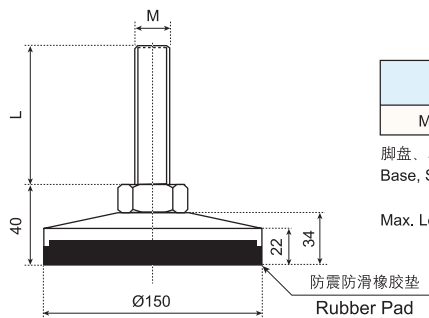

Unit: mm


编号 Code -C / -SS	螺纹直径 (Dia. M)	螺纹长度 (Length L)
MFD150-30183	M30	183

脚盘、螺杆、螺母材质：不锈钢或碳钢镀锌或碳钢磷化发黑；最大承重：5000Kg  
Base, Spindle and Nut: Stainless Steel, Nickel Plated Carbon Steel, or Black Phosphate Carbon Steel

Max. Load: 5000Kg

## 支撑脚架 *Frame Support Bases*


### N101 三爪脚架 N101 SUPPORT BASE (TRIPOD)



编号 Code	孔径 ØDF (mm)	重量 Weight (kg)
N101 - 48.3	48.3	1.395
N101 - 50.9	50.9	1.390
N101 - 60.3	60.3	1.380

材质：增强尼龙配不锈钢螺丝组  
Material: Reinforced Polyamide with Stainless Steel Set Screws


### N102 两爪脚架 N102 SUPPORT BASE (BIPOD)



编号 Code	孔径 ØDF (mm)	重量 Weight (kg)
N102 - 48.3	48.3	1.075
N102 - 50.9	50.9	1.070
N102 - 60.3	60.3	1.025

材质：增强尼龙配不锈钢螺丝组  
Material: Reinforced Polyamide with Stainless Steel Set Screws


### N103 180° 两爪半脚架 N103 SUPPORT BASE (BIPOD 180° WITH JOINT)



编号 Code	孔径 ØDF (mm)	重量 Weight (kg)
N103 - 48.3	48.3	1.290
N103 - 50.9	50.9	1.270
N103 - 60.3	60.3	1.255

材质：增强尼龙配不锈钢螺丝组  
Material: Reinforced Polyamide with Stainless Steel Set Screws

### N104 120° 两爪半脚架 N104 SUPPORT BASE (BIPOD 120° WITH JOINT)



编号 Code	孔径 ØDF (mm)	重量 Weight (kg)
N104 - 48.3	48.3	1.290
N104 - 50.9	50.9	1.285
N104 - 60.3	60.3	1.240


材质：增强尼龙配不锈钢螺丝组  
Material: Reinforced Polyamide with Stainless Steel Set Screws





## 支撑脚架 *Frame Support Bases*


**N105 方型三爪脚架**  
**N105 SUPPORT BASE (TRIPOD)**



编号 Code	孔径 ØDF (mm)	重量 Weight (kg)
N105 - 48.3	48.3	1.395
N105 - 50.9	50.9	1.390
N105 - 60.3	60.3	1.380

材质: 增强尼龙配不锈钢螺丝组  
Material: Reinforced Polyamide with Stainless Steel Set Screws

**N106 方型两爪脚架**  
**N106 SUPPORT BASE (BIPOD)**

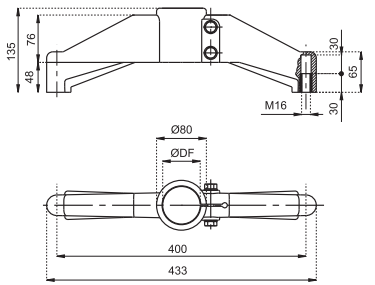


编号 Code	孔径 ØDF (mm)	重量 Weight (kg)
N106 - 48.3	48.3	1.075
N106 - 50.9	50.9	1.070
N106 - 60.3	60.3	1.025

材质: 增强尼龙配不锈钢螺丝组  
Material: Reinforced Polyamide with Stainless Steel Set Screws



**N108 120° 方型两爪半脚架**  
**N108 SUPPORT BASE (BIPOD 120° WITH JOINT)**

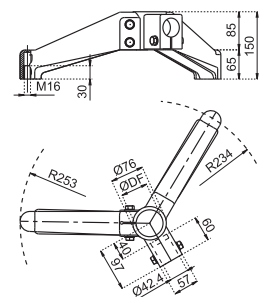

编号 Code	孔径 ØDF (mm)	重量 Weight (kg)
N108 - 48.3	48.3	1.290
N108 - 50.9	50.9	1.285
N108 - 60.3	60.3	1.240

材质: 增强尼龙配不锈钢螺丝组  
Material: Reinforced Polyamide with Stainless Steel Set Screws

FRAME SUPPORT BASES







## 方管/圆管脚套 Threaded Tube Ends For Square / Round Tube

### N109 方管脚套

### N109 THREADED TUBE END FOR SQUARE TUBE

Unit: mm



编号 Code	内螺纹 M (Dia. M)	外形尺寸 Dimension				方管 Square Tube		
		B	C	H	S	外径 (ØEXT.)	内径 (ØINT.)	壁厚 Thickness
N109-B38x1.5-M10	M10							
N109-B38x1.5-M12	M12							
N109-B38x1.5-M14	M14	38	35.4	43	35	38.1	34.9	1.5
N109-B38x1.5-M16	M16							
N109-B38x1.5-M20	M20							
N109-B40x1.5-M10	M10							
N109-B40x1.5-M12	M12							
N109-B40x1.5-M14	M14	40	37.5	43	35	40	37	1.5
N109-B40x1.5-M16	M16							
N109-B40x1.5-M20	M20							
N109-B50x2-M12	M12							
N109-B50x2-M14	M14	50	46.5	55	44	50	46	2
N109-B50x2-M16	M16							
N109-B50x2-M20	M20							




材质: 增强尼龙配黄铜衬套

Material: Reinforced Polyamide with Brass Threaded Bushing

### N110 圆管脚套

### N110 THREADED TUBE END FOR SQUARE TUBE

Unit: mm



编号 Code	内螺纹 M (Dia. M)	外形尺寸 Dimension				圆管 Round Tube		
		B	C	H	S	外径 (ØEXT.)	内径 (ØINT.)	壁厚 Thickness
N110-B38x1.5-M10	M10							
N110-B38x1.5-M12	M12	38	35.5	43	34	38	35	1.5
N110-B38x1.5-M14	M14							
N110-B38x1.5-M16	M16							
N110-B42x1.5-M10	M10							
N110-B42x1.5-M12	M12							
N110-B42x1.5-M14	M14	42	39.9	42	34	42.4	39.4	1.5
N110-B42x1.5-M16	M16							
N110-B42x1.5-M20	M20							
N110-B48x2-M12	M12							
N110-B48x2-M14	M14	48	45	49	38	48.3	44.3	2
N110-B48x2-M16	M16							
N110-B48x2-M20	M20							
N110-B50*2-M16	M16	50	48.4	49	38	50.9	46.9	2
N110-B50*2-M20	M20							
N110-B60x2-M16	M16							
N110-B60x2-M20	M20	60	56.7	54.5	44.5	60.3	56.3	2
N110-B60x2-M24	M24							


材质: 增强尼龙配黄铜衬套

Material: Reinforced Polyamide with Brass Threaded Bushing

THREADED TUBE ENDS

## 管套 / 连接器 Rod Holder Insert / Connecting Joints


### N110B 圆管管套 N110B ROD HOLDER INSERT FOR ROUND TUBE

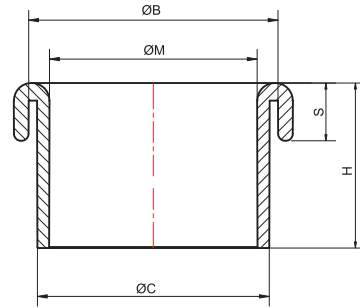

编号 Code	内径 (Dia. M)	外形尺寸 Dimension (mm)				圆管 Round Tube (mm)		
		B	C	H	S	外径 (ØEXT.)	内径 (ØINT.)	壁厚 Thickness
N110B-TD25.4	17	25.6	22	33.7	11.8	25.4	22.2	1.2-1.6
N110B-TD38.1	30	38.7	34.8	33.7	11.8	38.1	34.9	1.2-1.6
N110B-TD50.8	42.4	50.9	47.5	33.7	11.8	50.8	47.6	1.2-1.6
N110B-TD63.5	55	63.6	60.2	33.7	11.8	63.5	60.3	1.2-1.6
N110B-TD76.2	68	76.7	73	33.7	11.8	76.2	73	1.2-1.6

材质: 尼龙  
Material: Polyamide


### N111 管背连接器 N111 CONNECTING JOINT

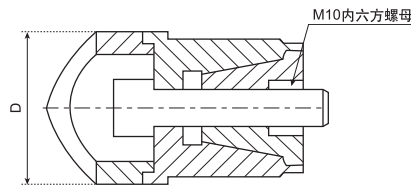

编号 Code	管材外径 Tube Outer Dia. D (mm)	管壁厚 Thickness (mm)	重量 Weight (kg)
N111 - 38	38	1.5	0.10
N111 - 42	42	2.1	0.10
N111 - 50	50	1.5	0.10

材质: 增强尼龙配不锈钢螺丝组  
Material: Reinforced Polyamide with Stainless Steel Set Screws


### N112A 方管连接器 N112A EXPANSION PLUG FOR SQUARE TUBE



编号 Code	管材外径 Tube Outer Dia. D (mm)	管壁厚 Thickness (mm)	重量 Weight (kg)
N112A - 20	20	1.2	0.10
N112A - 38	38	1.5	0.10
N112A - 40	40	1.5	0.10

材质: 增强尼龙配不锈钢螺丝组  
Material: Reinforced Polyamide with Stainless Steel Set Screws

### N112B 圆管连接器 N112B EXPANSION PLUG FOR ROUND TUBE

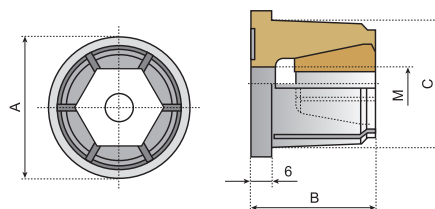


编号 Code	M (mm)	A (mm)	B (mm)	C (mm)	壁厚 Thickness (mm)
N112B - M8	8	38	41	34.8	1.5
N112B - M10	10	38	41	34.8	1.5

材质: 增强尼龙配不锈钢螺丝组  
Material: Reinforced Polyamide with Stainless Steel Set Screws




# 轴套 Shaft Collars

## N113 圆形固定轴套 N113 SPLIT SHAFT COLLAR FOR ROUND SHAFT

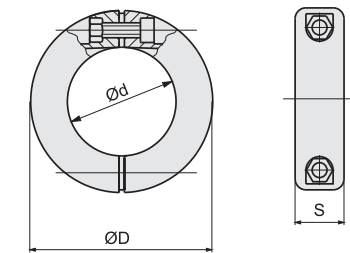

编号 Code	Ød (mm)	ØD (mm)	S (mm)
N113 - 12	12	45	14
N113 - 16	16	45	14
N113 - 20	20	45	14
N113 - 25	25	50	16


材质：增强尼龙配不锈钢螺丝组  
Material: Reinforced Polyamide with Stainless Steel Set Screws

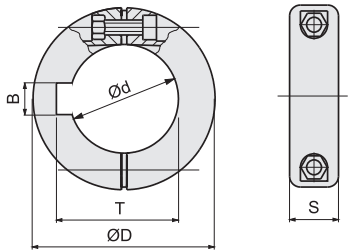

编号 Code	Ød (mm)	ØD (mm)	T (mm)	B (mm)	S (mm)
N113 - 30	30	50	33.3	8	16
N113 - 35	35	63.5	38.3	10	18
N113 - 40	40	63.5	43.3	12	18

材质：增强尼龙配不锈钢螺丝组  
Material: Reinforced Polyamide with Stainless Steel Set Screws

## N114 方型固定轴套 N114 SPLIT SHAFT COLLAR FOR SQUARE SHAFT

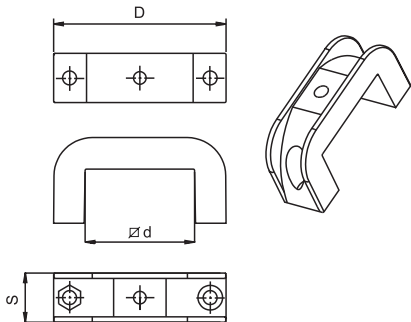

编号 Code	Ød (mm)	ØD (mm)	S (mm)
N114 - 25.4	25.4	50	20
N114 - 30	30	Ø56	16
N114 - 31.8	31.8	Ø56	16
N114 - 38.1	38.1	64	20
N114 - 40	40	64	20
N114 - 50	50	75	20
N114 - 60	60	85	20
N114 - 63.5	63.5	88	20

材质：增强尼龙配不锈钢螺丝组  
Material: Reinforced Polyamide with Stainless Steel Set Screws





STAINLESS STEEL SHAFT COLLAR




STEEL SHAFT COLLAR


## 轴套安装示意图 ASSEMBLY OF SPLIT SHAFT COLLAR

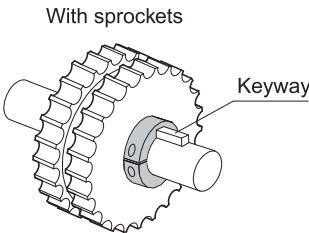

- 可折式轴套便于拆卸安装，免除拆转动轴的麻烦。
- 轴套用于固定链轮在轴上，减轻链轮轴向滑动。
- 可免于轴上加工键槽。




- Foldable shaft sleeves simplify assembly
- Secures sprockets on shafts, reducing axial sliding
- Eliminates shaft keyway machining






## 管连接片 *Tube Ends*

**N123 方管金属连接片**  
**N123 METAL END FOR SQUARE TUBE**

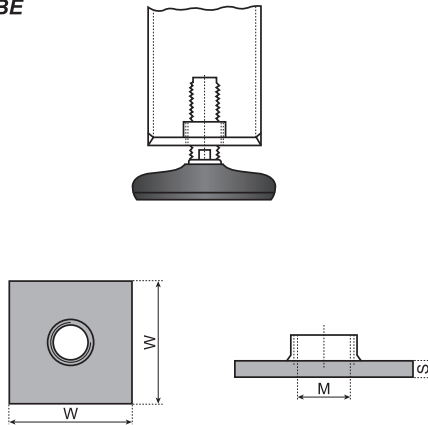


编号 Code	M	W (mm)	S (mm)	材质 Material
N123 - W38 - M16	M16	38	3	SUS304
N123 - W38 - M20	M20			
N123 - W40 - M16	M16	40	3	SUS304
N123 - W40 - M20	M20			
N123 - W50 - M16	M16	50	3	SUS304
N123 - W50 - M20	M20			
N123 - W60 - M16	M16	60	4	SUS304
N123 - W60 - M20	M20			

**N124 圆管金属连接片**  
**N124 METAL END FOR ROUND TUBE**

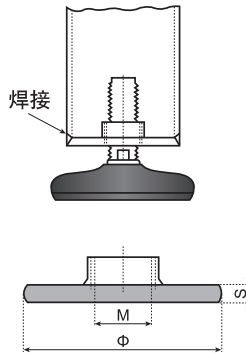

编号 Code	M	W (mm)	S (mm)	材质 Material
N124 - Ø38 - M16	M16	38	3	SUS304
N124 - Ø38 - M20	M20			
N124 - Ø48.3 - M16	M16	48.3	4	SUS304
N124 - Ø48.3 - M20	M20			
N124 - Ø50 - M16	M16	50	4	SUS304
N124 - Ø50 - M20	M20			


**N125 方管塞头**  
**N125 THREADED TUBE END FOR SQUARE TUBE**

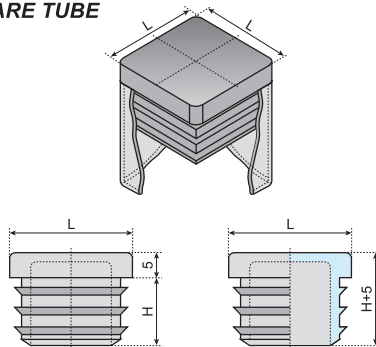

编号 Code	管径 LxL (mm)	壁厚 Thickness (mm)	H (mm)	重量 kg
N125 - ST25	25x25	1.0-1.5	13.5	0.0034
N125 - ST30	30x30	1.0-1.5	14.0	0.0058
N125 - ST38	38x38	1.0-1.5	14.5	0.0074
N125 - ST40	40x40	1.0-1.5	14.5	0.0075
N125 - ST50	50x50	1.0-2.0	15.5	0.0116

材质: 聚丙烯  
Material: Polypropylene

**N126 圆管塞头**  
**N126 THREADED TUBE END FOR ROUND TUBE**

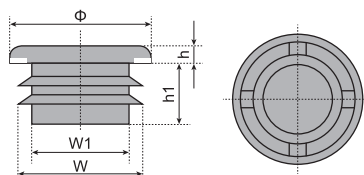

编号 Code	Φ (mm)	h (mm)	h1 (mm)	W1 (mm)	W (mm)	管径 Tube Dia.
N126 - RT12	12	2	5	7	10	Φ12
N126 - RT25	25	2	17	19	23	Φ25
N126 - RT38	38	4	30	32	37	Φ38
N126 - RT48	48	6	40	42	46	Φ48
N126 - RT50	50	6	42	44	49	Φ50

材质: 聚丙烯  
Material: Polypropylene



#### DISTRIBUTOR

地址: 江苏省常州市龙城大道2188号新闸科技工业园2号楼  
 Add: Building No.2, Xinzha Hi-tech Industrial Park  
 No.2188, Longcheng Ave., Changzhou, Jiangsu,  
 China 213012  
 电话: (Tel) +86-519-88166775, 86617695  
 E-Mail: [sales@net-conveyor.com](mailto:sales@net-conveyor.com)  
 Web: [www.net-conveyor.com](http://www.net-conveyor.com)

