



滚珠直输链 *Straight Running Chains with Low Noise Accumulation Rollers*

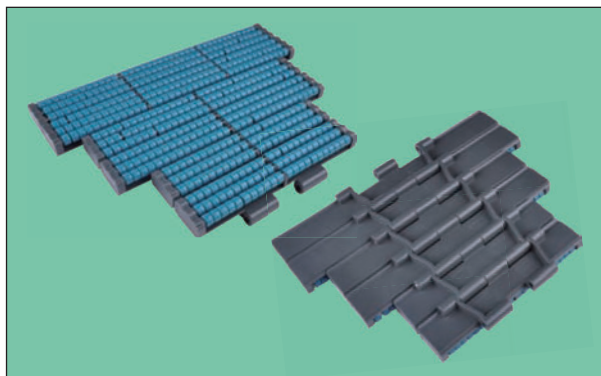


链轮 Sprocket

Page C10/C11

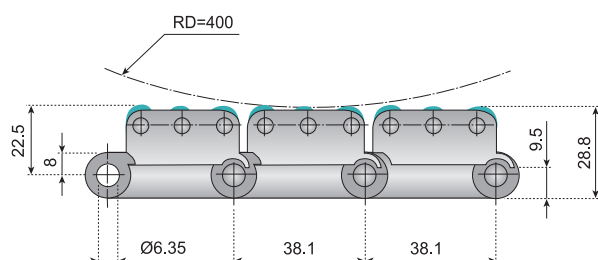





- 主要适用于各种食品，饮料，保特瓶，铝罐等收缩膜或纸箱包装线输送。
- 最大输送长度：12米
- 工作载荷：2680N
- 轴心材质：不锈钢
- 链板及滚珠材质：POM塑钢
 - 使用温度：-40° C 到 90° C
- 包装：
 - 5英尺 = 1.524 米/盒 1米 = 26片
- Primarily suitable for shrink-wrap and cardboard packaging conveyor lines, adept at conveying various food items, beverages, PET bottles, and containers.
- Max. conveying length: 12 m
- Working load: 2680N
- Pin material: austenitic stainless steel
- Plate material: POM acetal
 - Operating temperature: -40°C to 90°C
- Packaging:
 - 5 ft = 1.524 m/box 1 m = 26 pieces

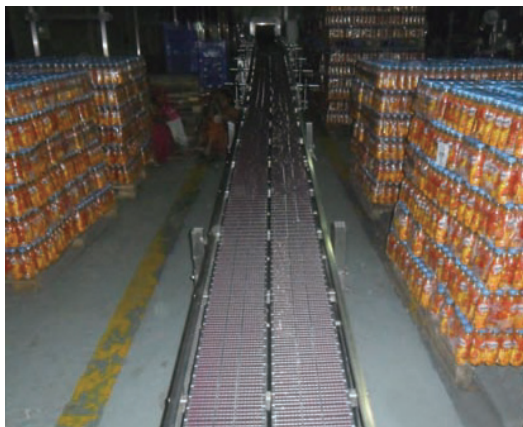

LBP821 滚珠双铰直输平顶链


LBP821 DOUBLE HINGE STRAIGHT RUNNING CHAIN WITH LOW NOISE ACCUMULATION ROLLERS

链号 Chain No.	宽度 Width (W)		重量 Weight kg/m
	mm	inch	
LBP821 - K750	190.5	7.5	5.4
LBP821 - K1000	254.0	10	6.8
LBP821 - K1200	304.8	12	8.1

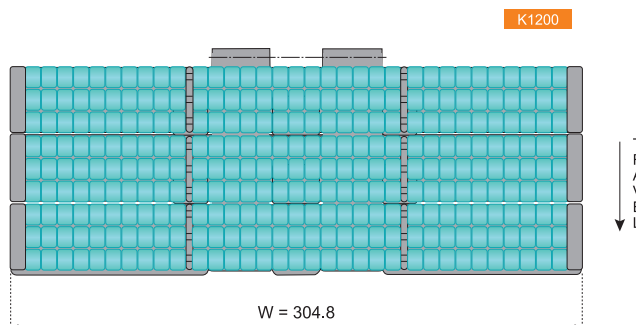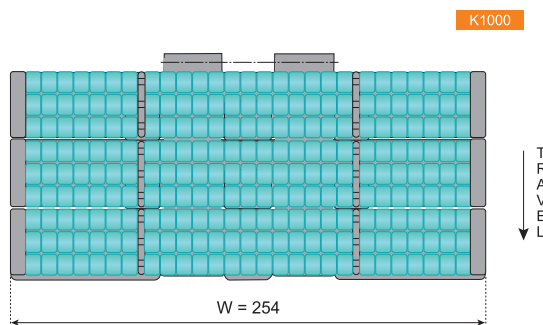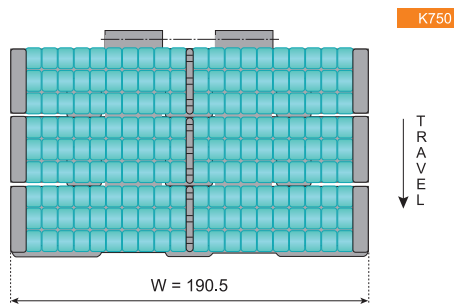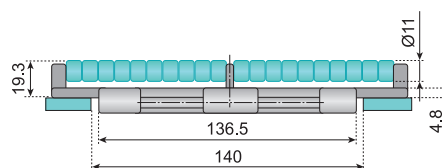

LBP8257 重载滚珠单铰直输链

LBP8257 HEAVY DUTY SINGLE HINGE STRAIGHT RUNNING CHAIN WITH LOW NOISE ACCUMULATION ROLLERS


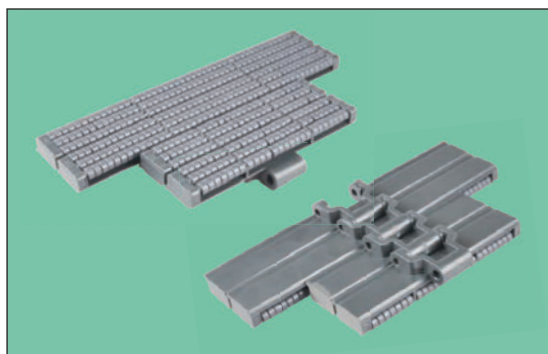


链号 Chain No.	宽度 Width (W)		重量 Weight kg/m
	mm	inch	
LBP8257 - K750	190.5	7.5	5.6
LBP8257 - K1000	254.0	10	7.2
LBP8257 - K1200	304.8	12	8.1



链轮 Sprocket


Page C13/C14

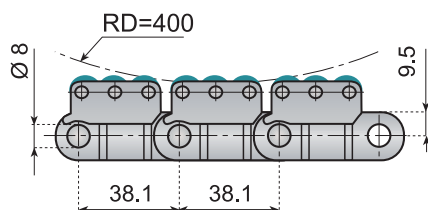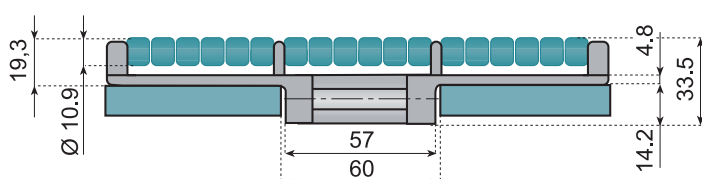

- 主要适用于各种食品，饮料，保特瓶，铝罐等收缩膜或纸箱包装线输送。
- 最大输送长度：12米
- 工作载荷：3830N
- 轴心材质：不锈钢
- 链板及滚珠材质：POM塑钢
 - 使用温度：-40° C 到 90° C
- 包装：
 - 5英尺 = 1.524 米/盒
 - 1米 = 26片


- Primarily suitable for shrink-wrap and cardboard packaging conveyor lines, adept at conveying various food items, beverages, PET bottles, and containers.
- Max. conveying length: 12 m
- Working load: 3830N
- Pin material: austenitic stainless steel
- Plate material: POM acetal
 - Operating temperature: -40°C to 90°C
- Packaging:
 - 5 ft = 1.524 m/box
 - 1 m = 26 pieces

K750

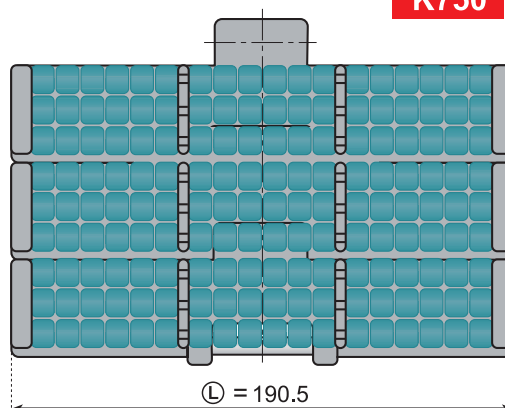


TRAVEL

K1000

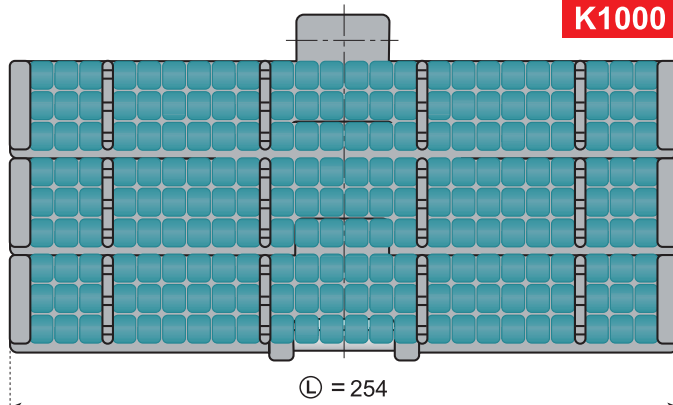


TRAVEL

K1200

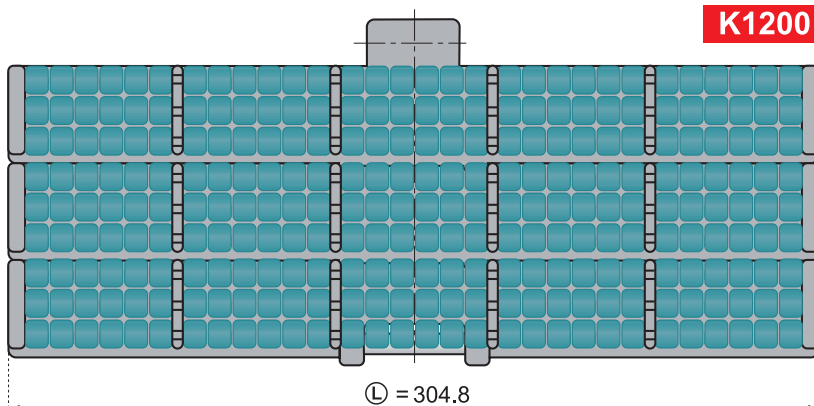

TRAVEL

滚珠直输链 *Straight Running Chains with Low Noise Accumulation Rollers*

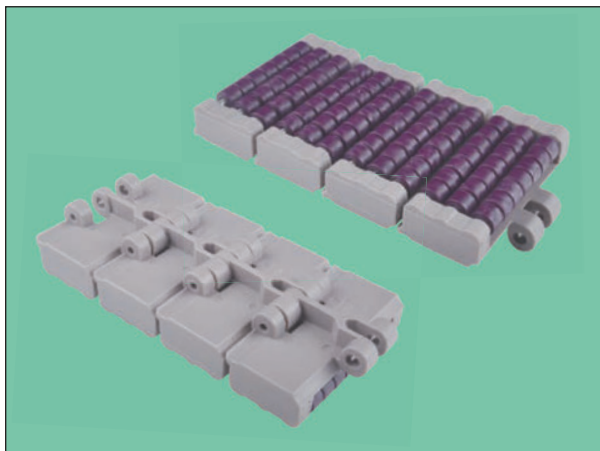



LBP831 滚珠单铰直输平顶链
LBP831 SINGLE HINGE STRAIGHT RUNNING CHAIN
WITH LOW NOISE ACCUMULATION ROLLERS

链号 Chain No.	宽度 Width (W)		重量 Weight kg/m
	mm	inch	
LBP831 - K325	82.5	3.25	2.2
LBP831 - K450	114.3	4.5	2.6





链轮 Sprocket

Page C8/C9

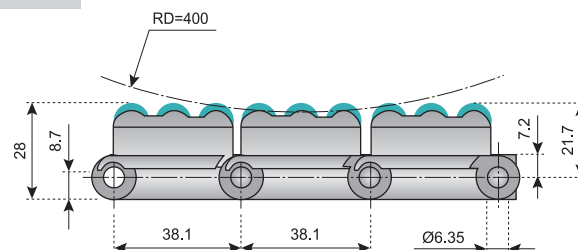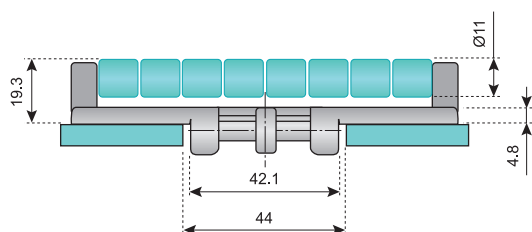

- 主要适用于各种食品，饮料，保特瓶，铝罐等收缩膜或纸箱包装线输送。
- 最大输送长度：12米
- 工作载荷：1230N
- 轴心材质：不锈钢
- 链板及滚珠材质：POM塑钢
 - 使用温度：-40° C 到 90° C
- 包装：
 - 10英尺 = 3.048 米/盒
 - 1米 = 26片
- Primarily suitable for shrink-wrap and cardboard packaging conveyor lines, adept at conveying various food items, beverages, PET bottles, and containers.
- Max. conveying length: 12 m
- Working load: 1230N
- Pin material: austenitic stainless steel
- Plate material: POM acetal
 - Operating temperature: -40°C to 90°C
- Packaging:
 - 10 ft = 3.048 m/box
 - 1 m = 26 pieces

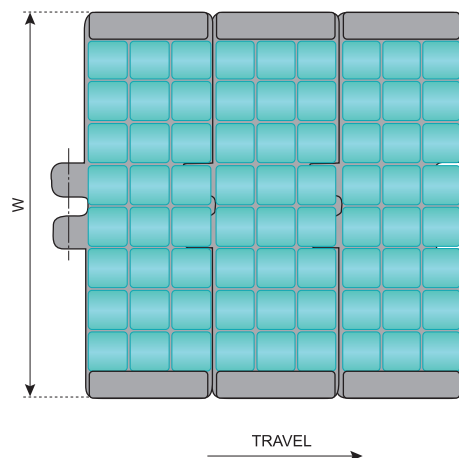

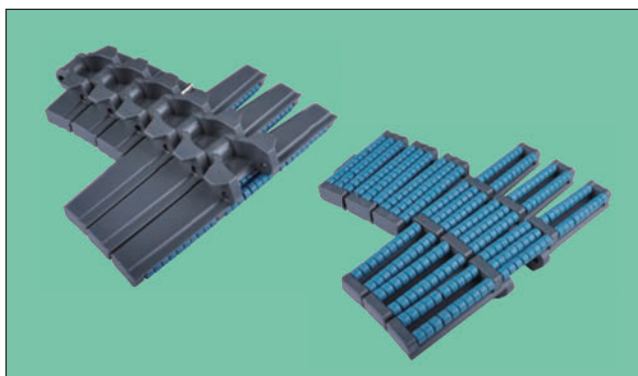

链轮 Sprocket




Page C13/C14

LBP882TAB 滚珠转弯平顶链


LBP882TAB SIDEFLEXING CHAIN

WITH LOW NOISE ACCUMULATION ROLLERS



链号 Chain No.	宽度 Width (W)		重量 Weight kg/m
	mm	inch	
LBP882TAB - K375	95.3	3.75	3.3
LBP882TAB - K450	114.3	4.5	3.5
LBP882TAB - K600	152.4	6.0	4.0
LBP882TAB - K750	190.5	7.5	4.5
LBP882TAB - K1000	254	10	5.7
LBP882TAB - K1200	304.8	12	6.3

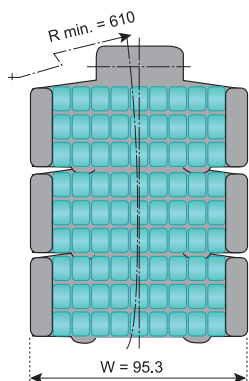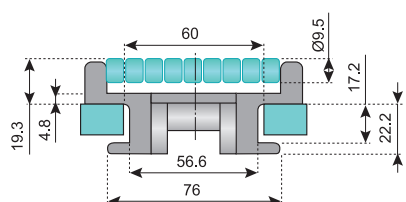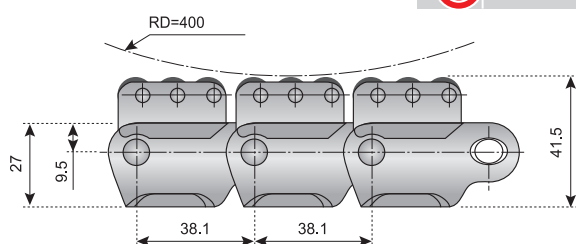


K375

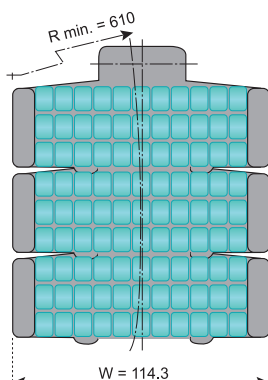


K450

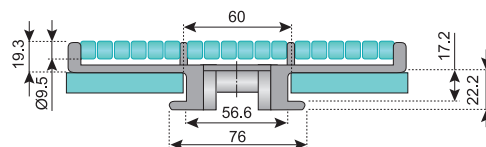

K750

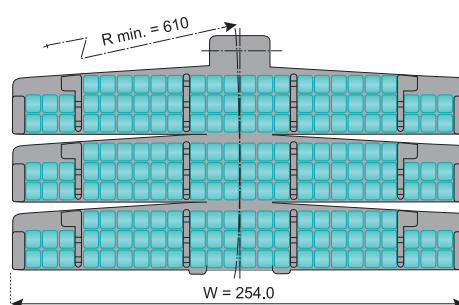

K1000

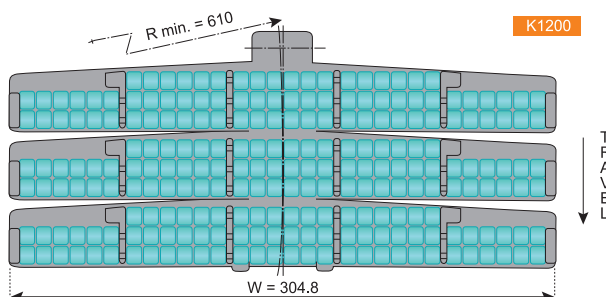


K1200



磁性重载单铰转弯滚珠链 Single Hinge Sideflexing Chains for Magnetic System

LBP882M 磁性重载单铰转弯滚珠链

LBP882M HEAVY DUTY SINGLE HINGE SIDEFLEXING CHAIN FOR MAGNETIC SYSTEM WITH LOW NOISE ACCUMULATION ROLLERS

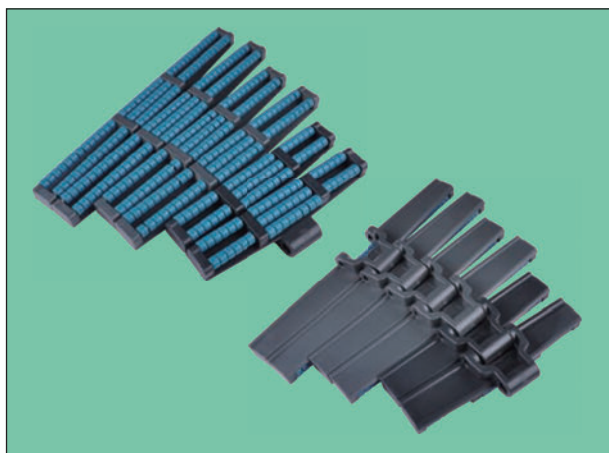

链轮 Sprocket
Page C13

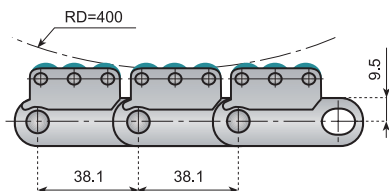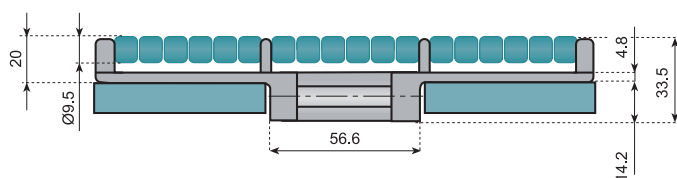

- 主要适用于各种食品，饮料，保特瓶，铝罐等收缩膜或纸箱包装线输送。
- 最大输送长度：12米
- 工作载荷：3830N
- 轴心材质：不锈钢
- 链板及滚珠材质：POM塑钢
 - 使用温度：-40° C 到 90° C
- 包装：
 - 10英尺 = 3.048 米/盒
 - 1米 = 26片

- Primarily suitable for shrink-wrap and cardboard packaging conveyor lines, adept at conveying various food items, beverages, PET bottles, and containers.
- Max. conveying length: 12 m
- Working load: 3830N
- Pin material: austenitic stainless steel
- Plate material: POM acetal
 - Operating temperature: -40°C to 90°C
- Packaging:
 - 10 ft = 3.048 m/box
 - 1 m = 26 pieces

链号 Chain No.	宽度 Width (W)		重量 Weight kg/m
	mm	inch	
LBP882M - K750	190.5	7.5	4.2
LBP882M - K1000	254.0	10	5.2
LBP882M - K1200	304.8	12	5.8

